
Release Date: July 30, 2019



Technical Service Bulletin

MODEL(S) AFFECTED:	T500e/T500 Scrubbers equipped with Smart-Fill™ ABW and Severe Environment system Models manufactured before December, 2018
SUBJECT:	The ABW and SE tank float switch may give a false indication of an empty tank. When the scrub head is in raised positioned, a magnetic field between the brush motor and float switch may cause the float switch to activate inadvertently.
PURPOSE:	To prevent the above condition, order float switch shield kit (p/n 9018447).

NOTES: Warranty Information: Standard warranty terms apply.

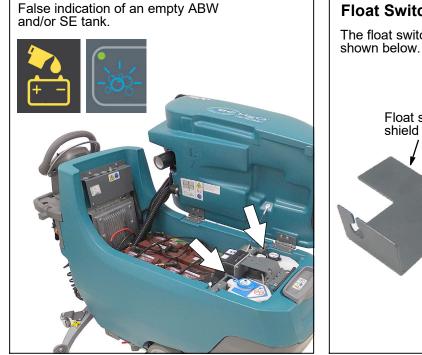

Float Switch Shield Kit (p/n 9018447)

The float switch shield kit attaches to the float switch as shown below.

