



## • THREE SPEED SWITCH REPLACEMENT INSTRUCTIONS

1. Remove the old switch.
2. Remove the knob from the old switch. You will re-use the knob. Discard the old switch and switchplate.
3. Fasten the new switch to the new switchplate using the two screws provided.

**IMPORTANT !!!** See the diagram below to fasten the switch to the switchplate. It is important not to install the switch upside-down on the switchplate.

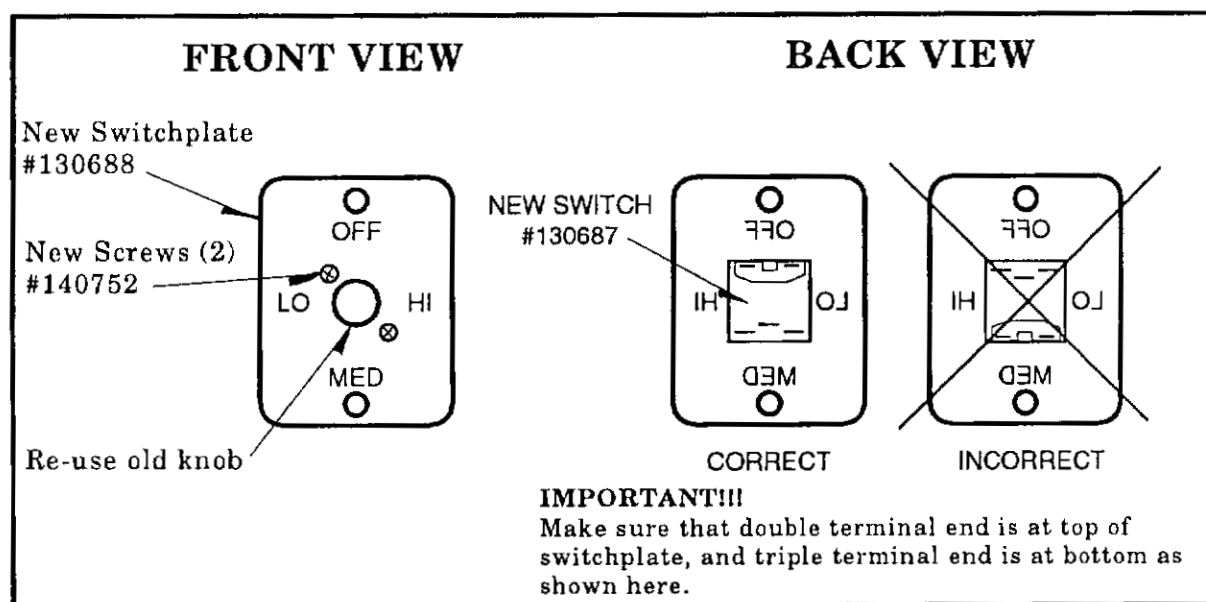

4. Connect the wires according to this wiring diagram.
5. Install the new switchplate on the blower.

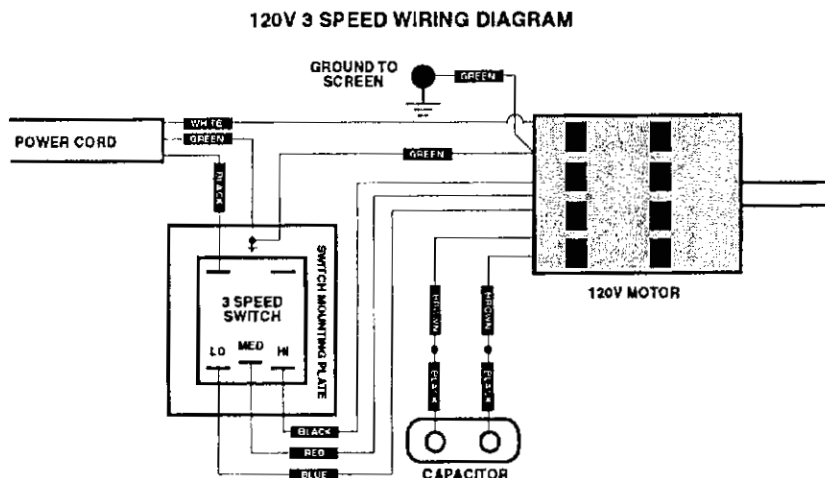

**WARNING!!!** To prevent shock hazard and serious personal injury, connect the green grounding wires to the screen and to the switchplate as shown here.