



INSTRUCTION BULLETIN

No. 340058
Machine: 7200
Published: 8-97/00
System: OPTIONS

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in your machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save you the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation Instructions for Kit number 223695

SYNOPSIS / PROBLEM:

This kit contains the parts needed to install seat belts on the model 7200 scrubber. Please follow step-by-step instructions.

SPECIAL TOOLS / CONSIDERATIONS: Hand drill, .503 drill bit

(Estimated time to complete: 1 hour)

INSTALLATION:

(Refer to FIG. 1)

FOR SAFETY: Before leaving or servicing machine, stop on level surface and set parking brake. Then turn off machine and remove key.

1. Use the dimensions in FIG. 1 to mark and drill the seat belt mount holes in the top of the seat support.
2. Attach each seat belt (1) to the seat support using the hex screws (2), one flat washer (3), through the mount hole in the belt, through the new holes in the seat support, the second flat washer (3), then, the nyloc nut--located on the under side of the seat support. Tighten the hardware.

BILL OF MATERIALS FOR SEAT BELT KIT 223695

Ref.	TENNANT Part No.	Description	Qty.
1	30533	Seat belt	1
2	41345	Hex screw, M12 x 25mm	2
3	32486	Flat washer, .50 SAE.	4
4	08711	Nyloc nut, M12	2

TENNANT COMPANY
P. O. Box 1452
Minneapolis, MN 55440-1452

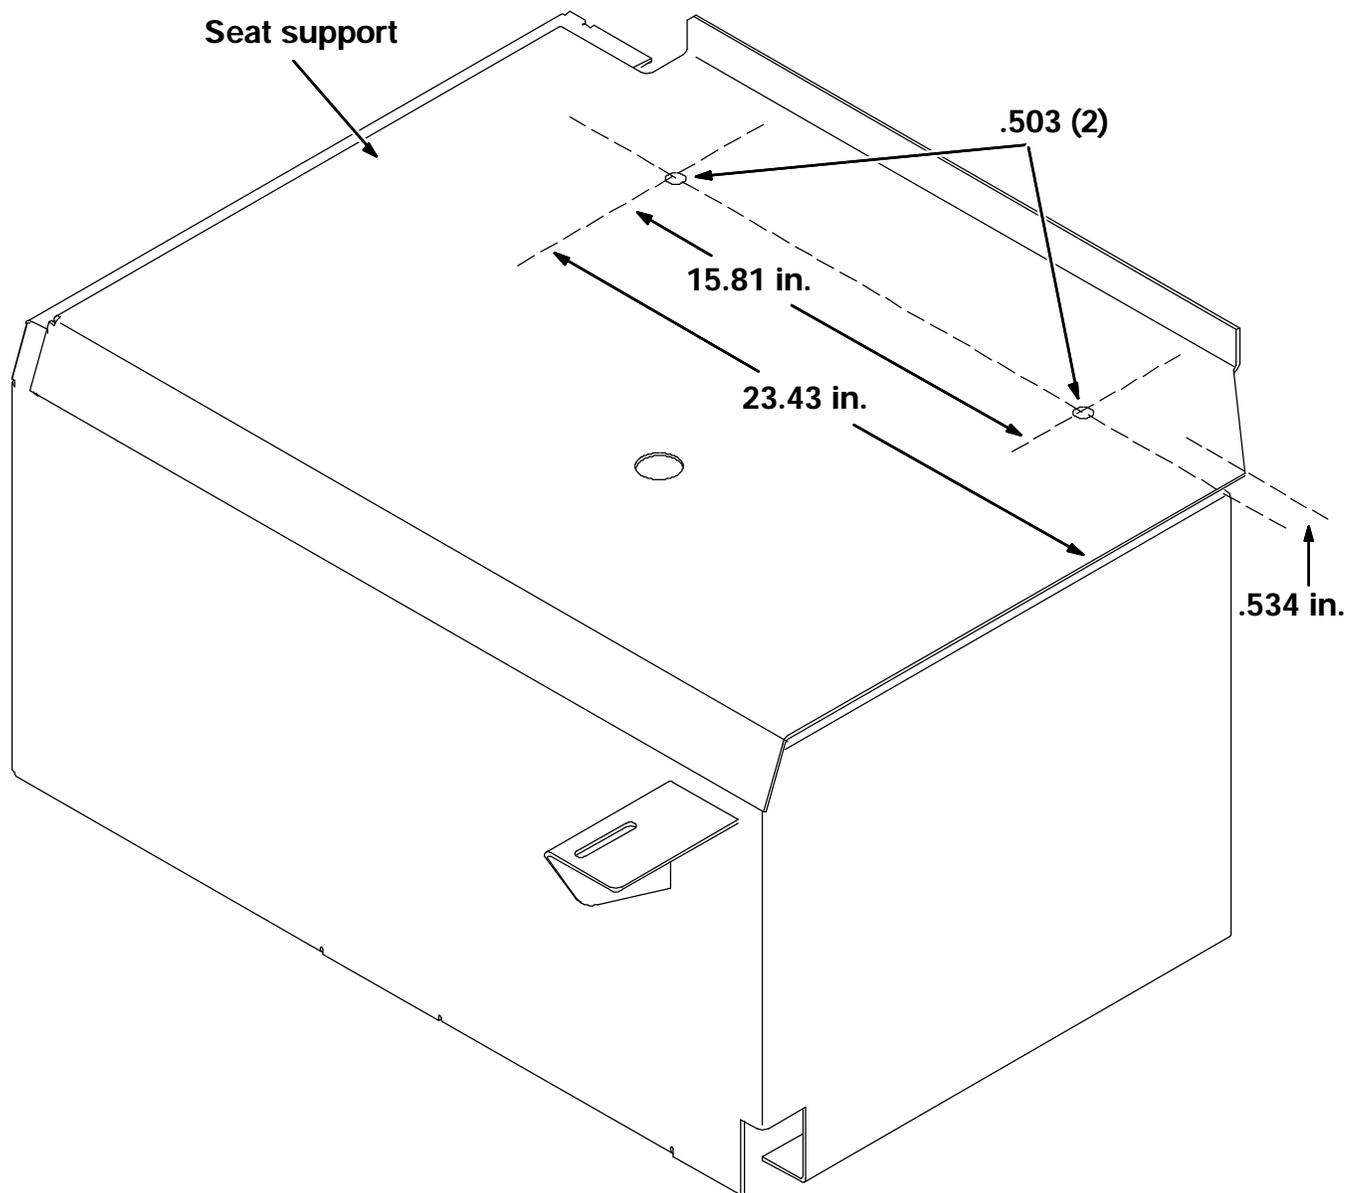


FIG. 1 - Hole Locations