



INSTRUCTION BULLETIN

No. 340314
Machine: Litter Hawk t
Published: 6-99/00
System: SWEEPING

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in your machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save you the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation instructions for kit number 382633

SYNOPSIS / PROBLEM:

This kit contains the parts needed to install hood prop rod brace screws on the Litter Hawk™ model vacuum.

Please follow step-by-step instructions.

SPECIAL TOOLS / CONSIDERATIONS: Hand drill, 3/8 drill bit

(Estimated time to complete: .5 hour)

PREPARATION:

(Refer to FIG. 1)

FOR SAFETY: Before leaving or servicing machine, stop on level surface and set parking brake. Then turn off machine and remove key.

INSTALLATION:

(Refer to FIG. 1)

1. Open cover assembly, and engage prop rod.
2. Using hood prop rod brace as a template, mark and drill two 9.5 mm (3/8 in) holes in the two top holes of the hood support brace.
3. Install screws (1), washers (2) and nuts (3) similar to the mounting hardware already holding the support brace.
4. Release the prop rod, and lower the hood.

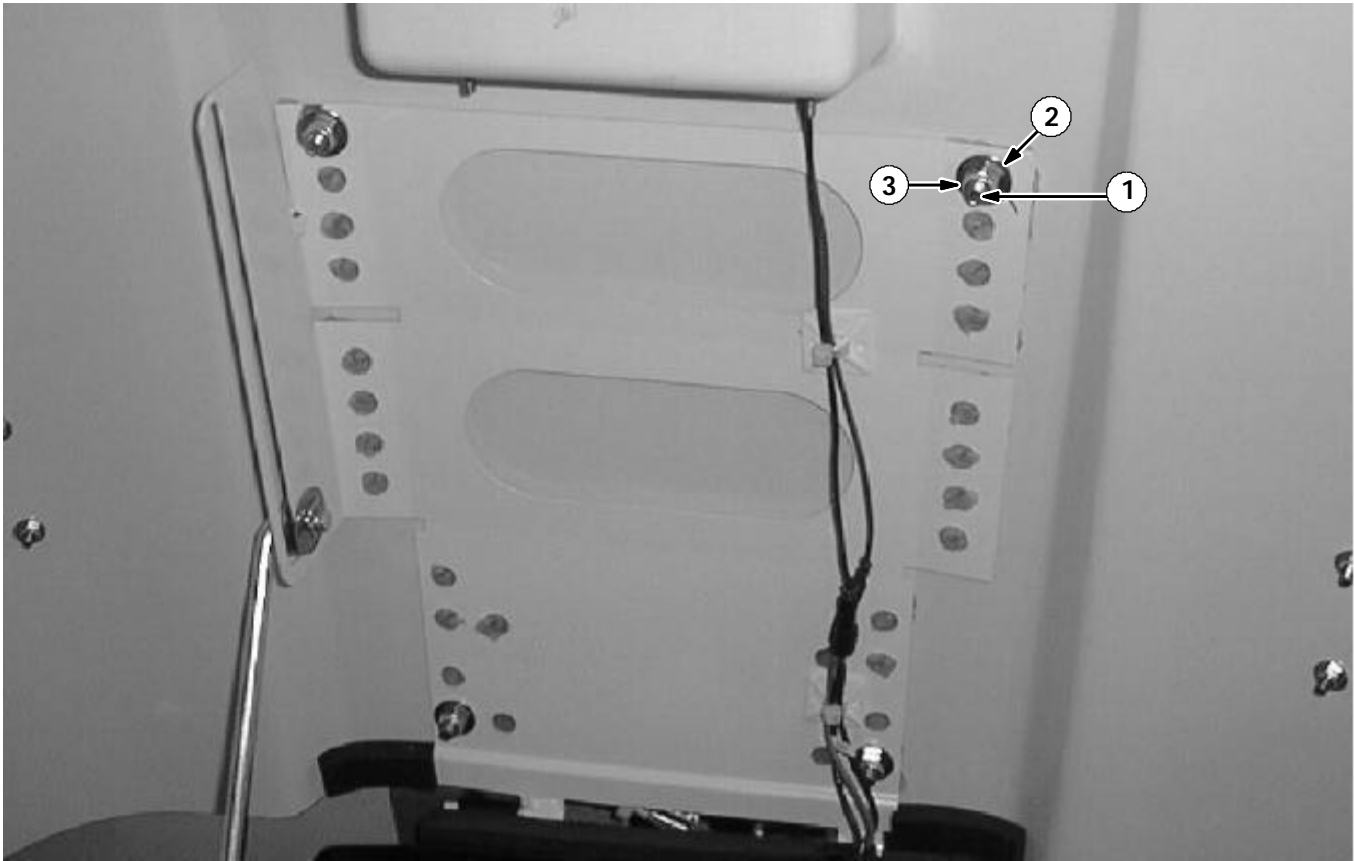


FIG. 1 - HOOD SUPPORT KIT INSTALLATION

BILL OF MATERIALS FOR SUPPORT INSTALLATION KIT 382633

Ref.	TENNANT Part No.	Description	Qty.
1	09737	Screw,	2
2	01685	Washer	4
3	08709	Nut	2

TENNANT COMPANY
P. O. Box 1452
Minneapolis, MN 55440-1452