



INSTRUCTION BULLETIN

No. 340869
Machine: 7200, T15
Published: 01-2009
Rev. 01

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in the machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation instructions for **kit number 9003786**

SYNOPSIS:

This kit contains the parts needed to replace the pre-sweep actuator on 7200 and T15 machines. Please follow step-by-step instructions.

SPECIAL TOOLS / CONSIDERATIONS: NONE

(Estimated time to complete: 1 hour)

PREPARATION:

1. Park the machine on a clean level surface, lower the pre-sweep brush, turn off the machine, remove the key, and set the parking brake (if equipped).

FOR SAFETY: Before leaving or servicing machine, stop on level surface, set parking brake (if equipped), turn off machine, and remove key.

2. Disconnect the battery cables from the batteries.



WARNING: Always disconnect battery cables from machine before working on electrical components.

3. Open the pre-sweep cover.

INSTALLATION:

1. Disconnect the pre-sweep harness from the actuator and remove the actuator from the pre-sweep assembly. Set all mounting hardware aside. Discard the old actuator. Refer to Fig. 2.
2. Turn the actuator (1) barrel away from the actuator until the edge of the barrel is 3.75" away from the body of the actuator. Refer to Fig. 1.

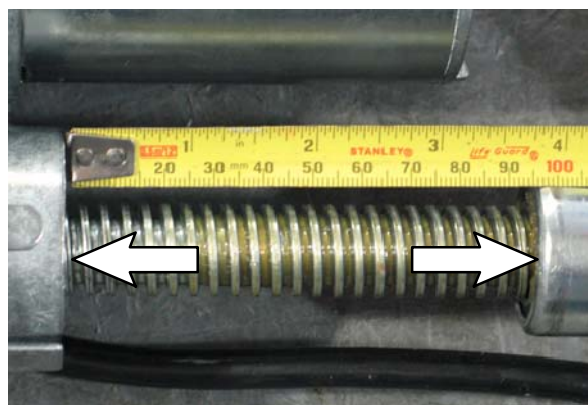


FIG. 1

3. Install the actuator (1) into the pre-sweep assembly and connect the pre-sweep lift cable to the actuator. Be sure the pre-sweep lift cable is on the pulleys before connecting it to the actuator. Refer to Fig. 2.
4. Connect the pre-sweep harness to the actuator (1). Refer to Fig. 2.
5. Reconnect the battery cables to the batteries.
6. Close the pre-sweep cover.
7. Start and test the machine.
8. Check the pre-sweep brush pattern. Adjust as necessary. Refer to the Operators Manual for instructions how to check and adjust the brush pattern.

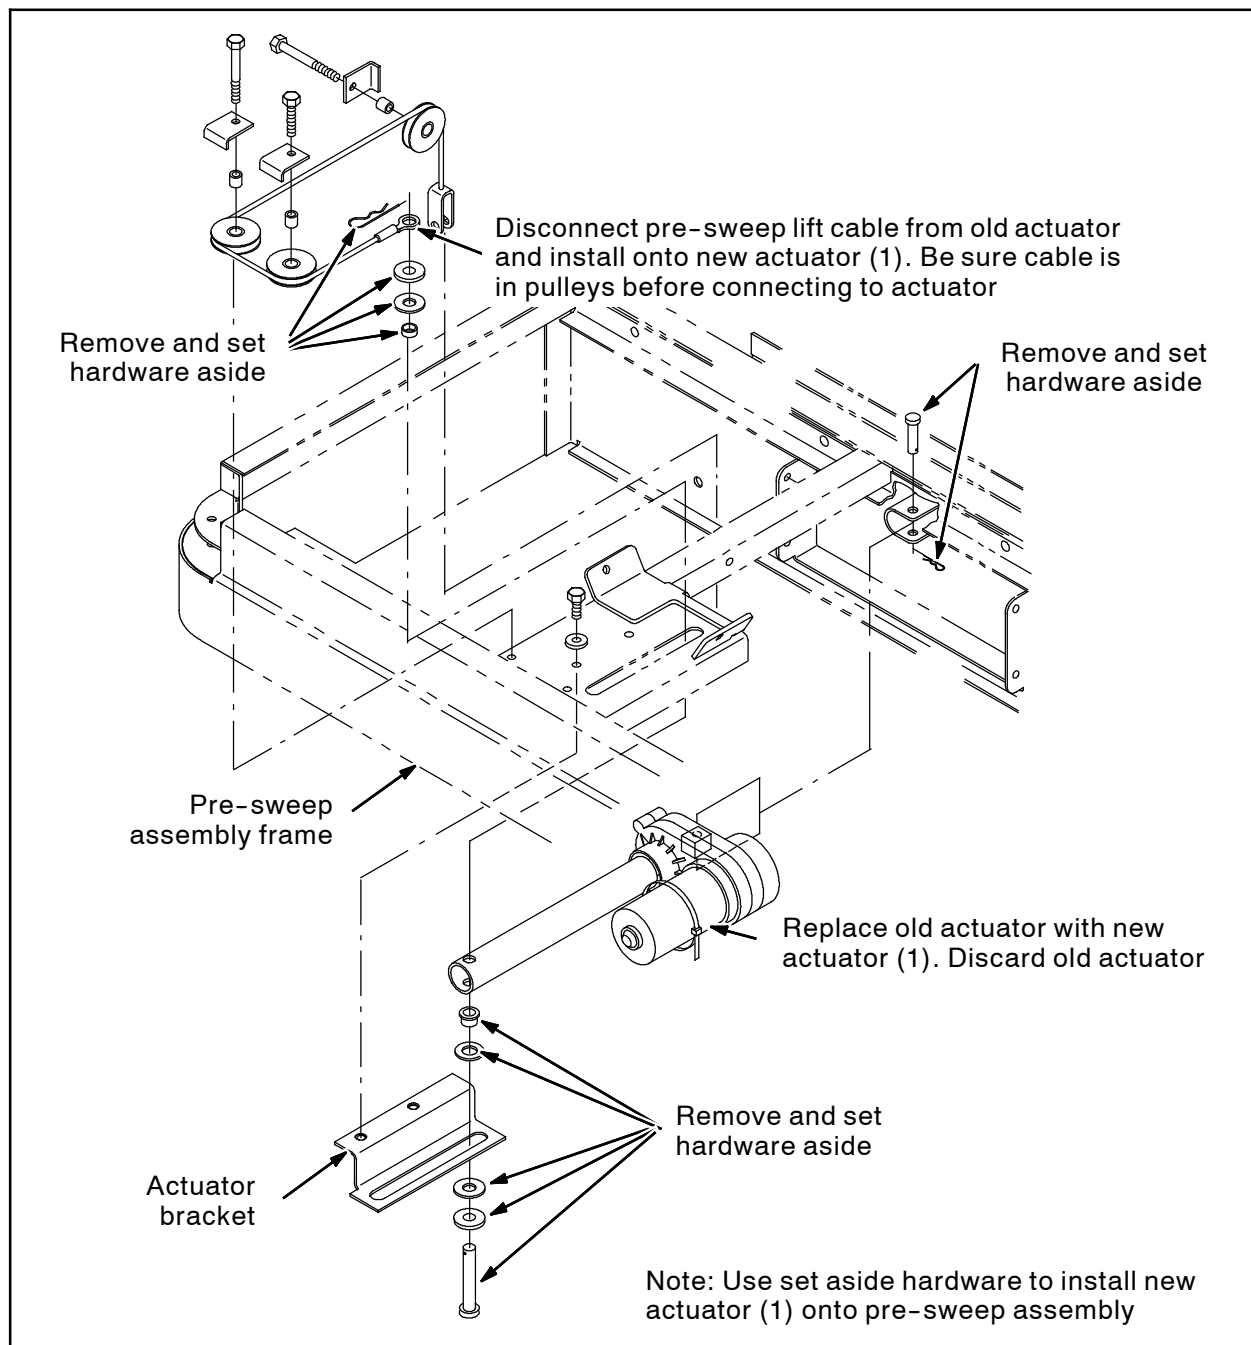


FIG. 2

Bill of Materials for Actuator Kit, Lift, Presweep, Replmt-9003786

Ref.	Tennant Part No.	Description	Qty.
▽	9003786	Actuator Kit, Lift, Presweep, Replmt	1
▲ 1	1052655	Actuator, 36VDC, 03.4Strk, 600 Lb	1

TENNANT COMPANY
P. O. Box 1452
Minneapolis, MN 55440-1452