



# UNPACKING INSTRUCTIONS

**TOOLS REQUIRED:** 1/2" Wrench, Hammer, Pry Bar, Safety Glasses and Protective Gloves.

**CRATE CONTENTS:** Machine w/batteries, Skirts, Squeegee Assembly, Pad Driver(s) and Charger.

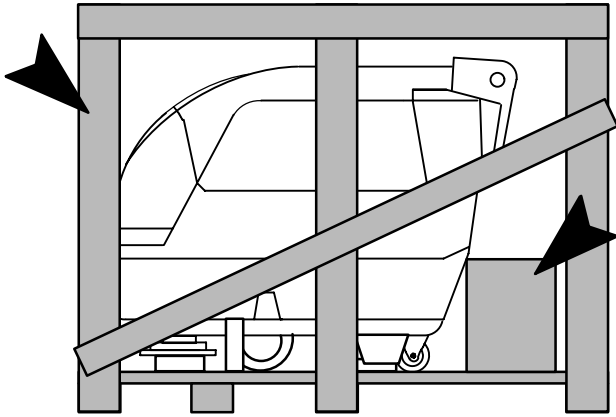


- 1** Disassemble the wooden box frame. Then remove the plastic wrap and accessories.

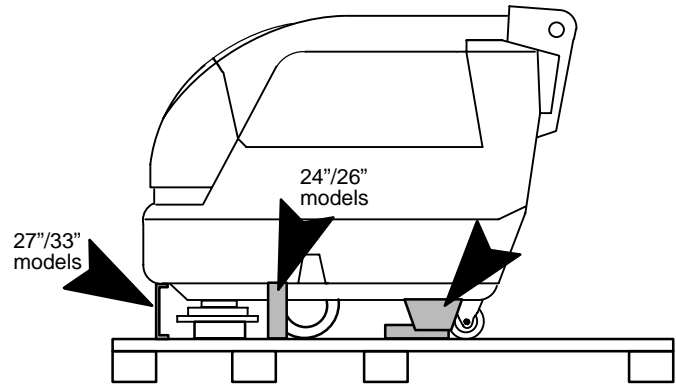


- 2** Remove the metal shipping support brackets. Make sure to reinstall nuts and washers that secure casters.


Cover connection with red rubber boot.

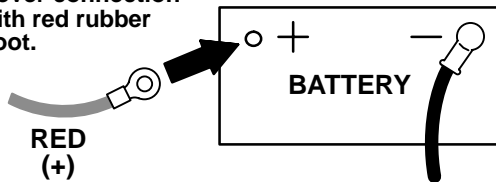


- 3** Open the battery compartment and connect the RED battery cable to the unoccupied positive (+) battery post (Refer to Operator Manual).  
**FOR SAFETY:** When handling battery cables, wear safety glasses and protective gloves.

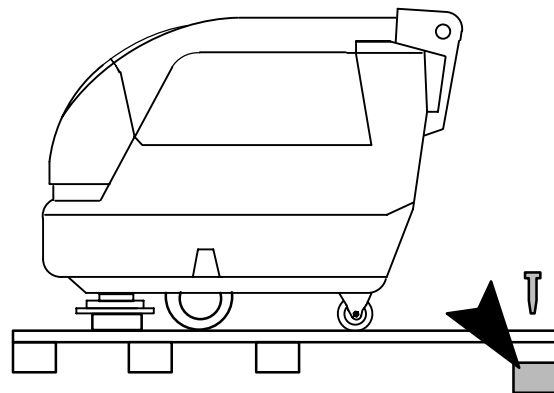

- 4** Remove the rear 4x4 board from the pallet.

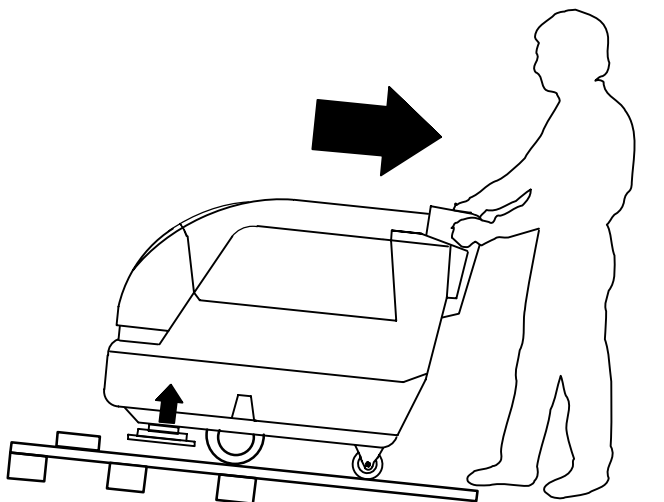

- 5** Raise the Scrub Head to the highest position. Then **CAREFULLY** back the machine off the pallet. The pallet will tip downward creating a ramp. **CAUTION:** Do not place feet under pallet when backing off machine.

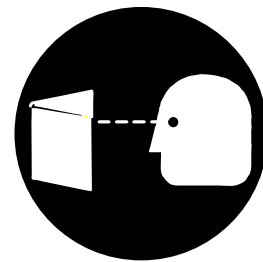

**FOR SAFETY:** Read Operator Manual before operating machine.