



# HOUR METER KIT

## INSTALLATION INSTRUCTIONS:

(Installation Time: 30 min.)

**TOOLS REQUIRED:** Phillips Screwdriver, 9/16" Wrench, 3/8" Wrench, Wire Cutters

**FOR SAFETY:** Before installing kit, disconnect positive (+) battery cable from batteries.

1. Remove four phillips head screws from control housing panel to access electrical components.
2. Remove hour meter plug and install hour meter.

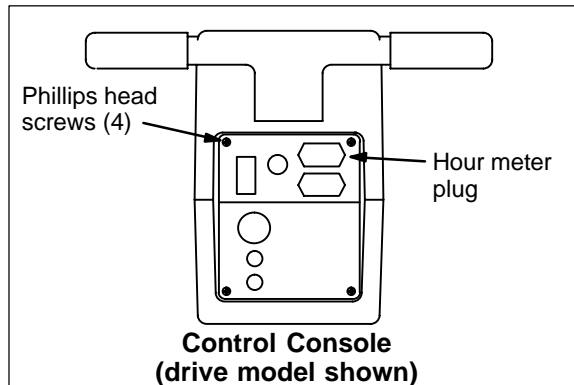


Fig. 1


### KIT CONTENTS

| P/N.   | Description | Qty. |
|--------|-------------|------|
| 630143 | Meter, Hour | 1    |

3. From machine wire harness, **Drive model:** locate blue wire #89 and green wire #90. **Push model:** locate blue wire #42 and black wire #43. Wires are connection ready. With wire cutters, snip two wire ties to unbind these wires from harness. Be careful not to cut any wires.
4. Connect these wires to hour meter as shown below.
5. Reinstall panel and reconnect battery cable.

Back view of console panels. Connect wiring as shown.

### drive model wiring

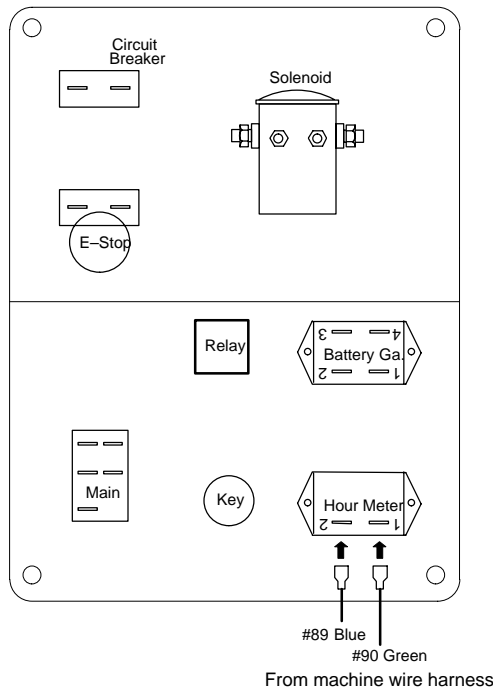

### push model wiring

