

EMERGENCY STOP BUTTON KIT

Models: 2510, 2550, Speed Gleam and Speed Gleam Plus



INSTALLATION INSTRUCTIONS:

(Installation Time: 15 min.)




TOOLS REQUIRED: Phillips Screwdriver, 9/16" Wrench, 7/8" Wrench, Wire Cutters

FOR SAFETY: Before installing kit, disconnect positive (+) battery cable from batteries.


1. Remove four Phillips head screws from control console panel to access electrical components.
2. Remove E-Stop plug from panel.
3. Install E-Stop button.
4. Connect wiring as instructed below.

KIT CONTENTS

P/N.	Description	Qty.
1011735	Switch, Emergency Stop Button	1
602996	Asm., Wire #16x5" Red, 1/4 F x 1/4 F	1
602997	Asm., Wire #16x5" Red, 1/4 M x 1/4 F	1

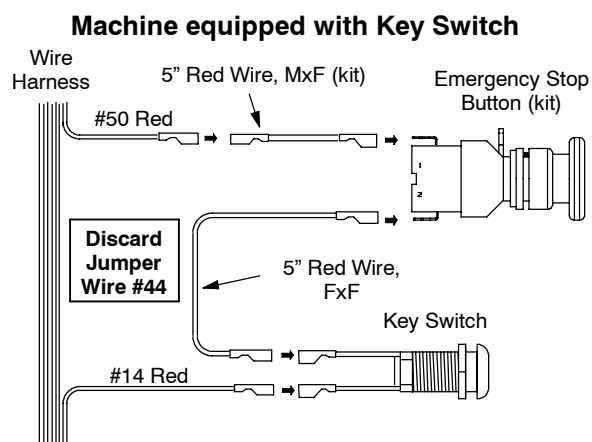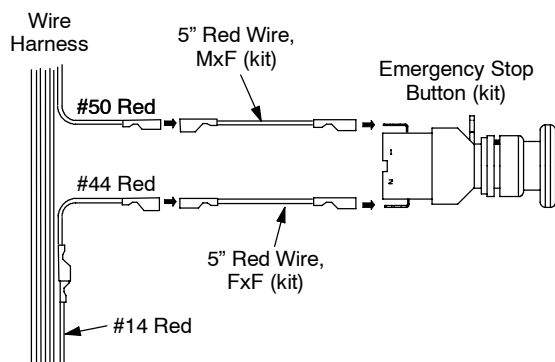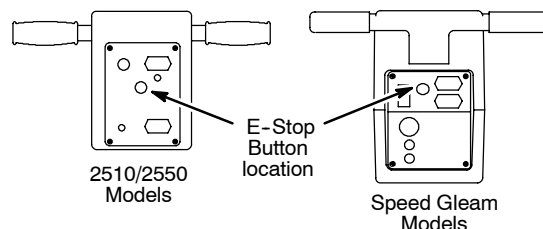

Machine equipped with On-board Battery Charger

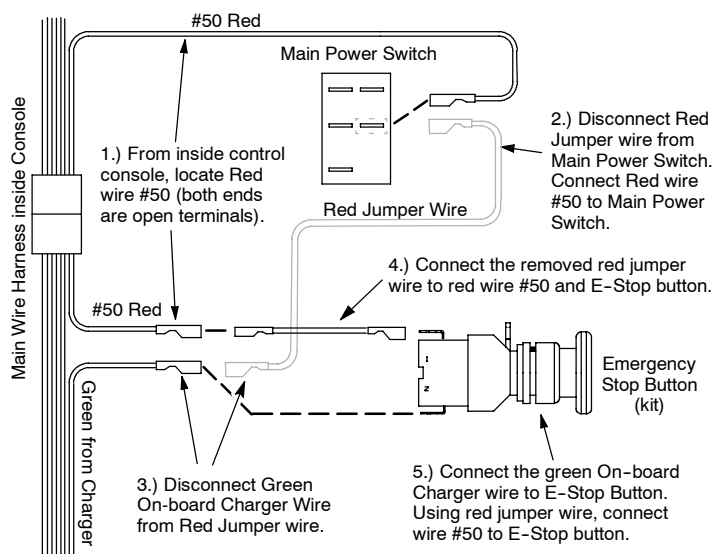

Machine equipped with On-board Battery Charger and Key Switch

