

Switch Fastener Kit

Model: T3 NA/INTL/JP



This kit is intended for machines manufactured before serial number 10350428, date code 10/07.

The purpose of this kit is to prevent bail switch from coming out of adjustment and/or switch damage.

INSTALLATION INSTRUCTIONS:

Installation Time: 1 Hour


TOOLS REQUIRED: 5.5 mm socket wrench, Phillips screwdriver, zip-tie cutters, needle nose pliers, 7mm wrench.

FOR SAFETY: Before installing kit, park machine on a level surface, turn key off and disconnect the negative (-) battery cable lead.


1. Remove the upper and lower control console panels to access bail switch(es).
2. Remove module (*Drive Model*). Do not disconnect wiring.
3. Cut zip-tie that secures wires to switch bracket assembly.
4. Disconnect wire terminals from bail switch(es).
5. Remove switch bracket assembly.
6. Install Kit as illustrated. Leave screws untightened to allow for switch adjustment later.
7. Reinstall switch bracket and reconnect wire terminals.
8. Adjust switch(es) according to control bail activation points. Use caution when tightening screws to avoid cracking switch(es) (*Torque 6 in-lbs*).
9. Reinstall module.
10. Replace panels.

Kit Contents


Part No.	Description	Qty.
1013705	PLATE, THREAD, SWITCH, M3 NUT, 96HR PL	2
1042062	SCREW, HEX, M3 X 0.5 X 25, SS	4
02938	WASHER, LOCK, INT, 08, SS	4
41578	WASHER, FLAT, 06, SS	8
1012568	SWITCH, BAIL, SNAP, 10A, SHORT	2

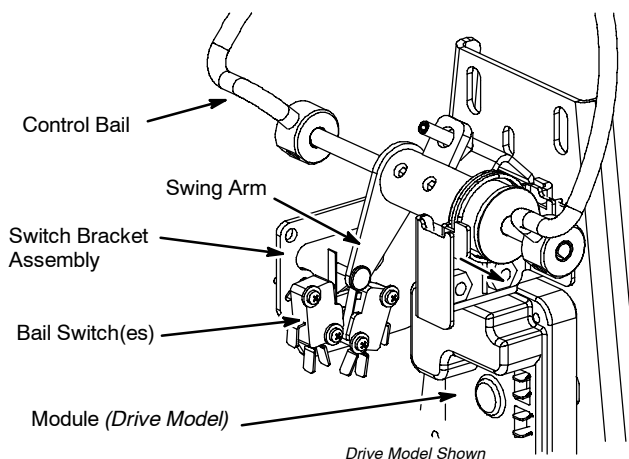

Kit Installation

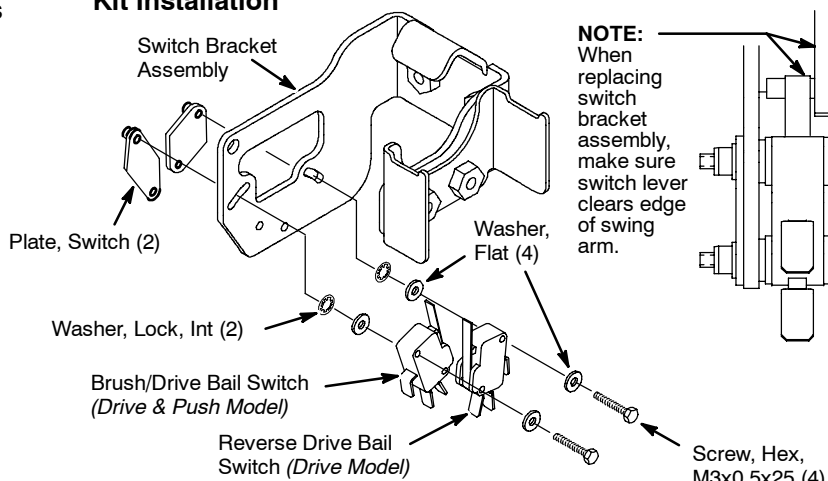

Control Bail Activation Points:

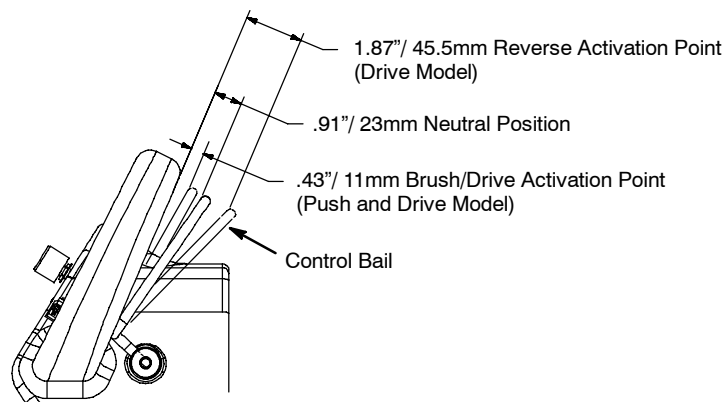

Control Bail Switch Wiring

