



# INSTRUCTION BULLETIN

No. 2953  
Machines: 186 E/EE  
Published: 5-86

Installation Instructions for Battery Gauge Kit 06734.

This kit contains a battery gauge for TENNANT® Models 186 E and 186EE. Please follow the step-by-step directions.

## PROCEDURE:

1. Park the machine on a level surface. Turn off the motor and set the parking brake (if present).

WARNING: Always turn off the motor and set the parking brake before working on the machine.

2. Disconnect the batteries-to-machine connector before working on electrical components.

WARNING: Always disconnect batteries-to-machine connector before working on machine electrical components to prevent electrical shock.

3. Remove the plug button in the instrument panel and insert the battery gauge. (See Fig. 1).

4. Connect Wire 2A Blue to the positive terminal of the gauge and Wire 13G Black to the negative terminal. The wires are part of the instrument panel wire harness.

5. Reconnect the batteries.

## BILL OF MATERIAL FOR BATTERY GAUGE KIT 06734

TENNANT® Part No.	Description	Qty.
01378	BATTERY GAUGE	1

TENNANT® COMPANY  
P. O. Box 1452  
Minneapolis, MN 55440-1452  
(612)540-1200

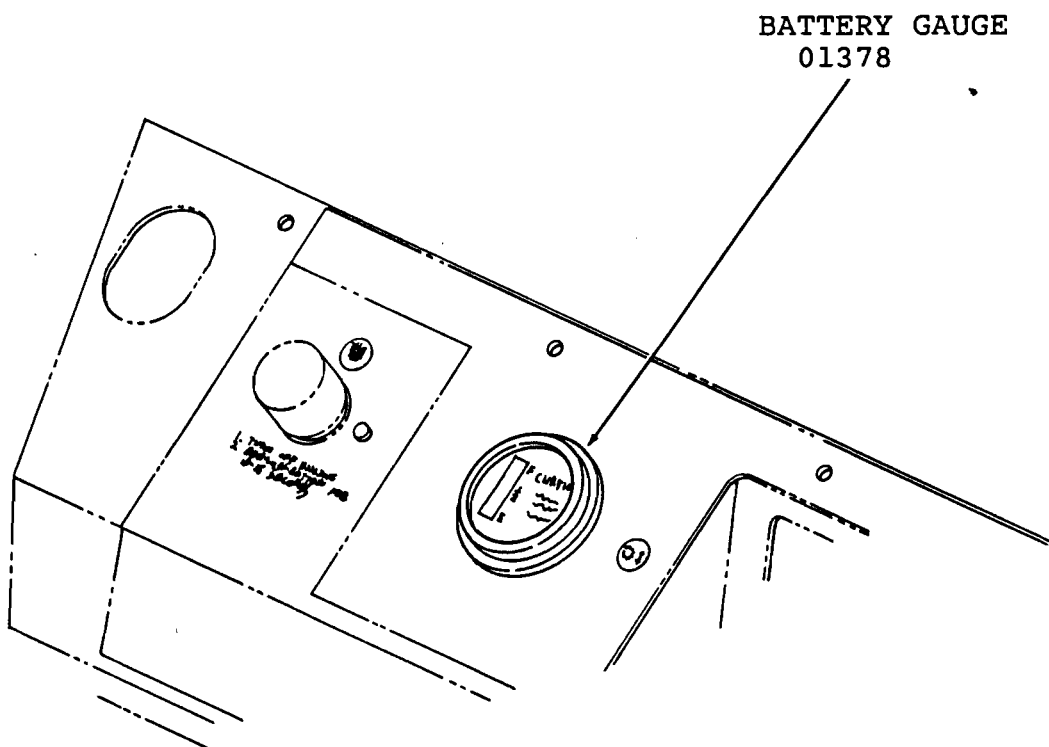


Fig. 1 - LOCATION OF BATTERY GAUGE