


Technical Service Bulletin

MODEL(S) AFFECTED:	T7 Rider Scrubber
SUBJECT:	If the machine must be manually pushed or towed, the following instructions must be performed.
PURPOSE:	To prevent the risk of control board failure.
NOTES:	

TO MANUALLY PUSH OR TOW THE MACHINE:

STEP 1: Disconnect the propel motor harness (three position connector).

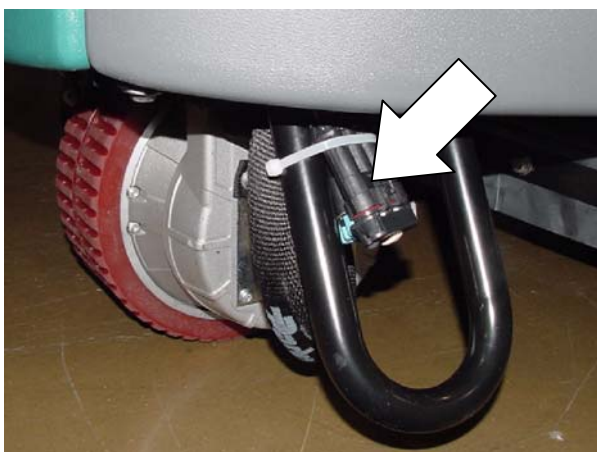

STEP 2: Insert a small screw driver between the electronic brake lever and hub to disable the parking brake.



ATTENTION: Immediately after pushing or towing the machine, remove the screw driver from the parking brake before reconnecting the motor harness.

Never push or tow the machine with the propel motor harness connected, control board damage may result.

FOR SAFETY: Do not push or tow the machine on inclines with parking brake disabled. Do not operate machine with parking brake disabled.