



## TECHNICAL SERVICE BULLETIN

No. 985700-004  
Machine: 5700 (ALL)  
System: CHASSIS

# PROPER LIFTING PROCEDURE

## SYNOPSIS:

How to correctly lift the Model 5700 machine.

## COURSE OF ACTION:

Please follow the procedure instructions.

## SPECIAL TOOLS / CONSIDERATIONS:

(Estimated Time to complete: 1 hours)

(Refer to Figure 1)



**FOR SAFETY:** Before leaving or servicing machine, stop on level surface and set parking brake. Then turn off machine and remove key.

## PROCEDURE:

1. Disconnect battery cables from machine.



**WARNING:** Always disconnect battery cables from machine before working on electrical components.

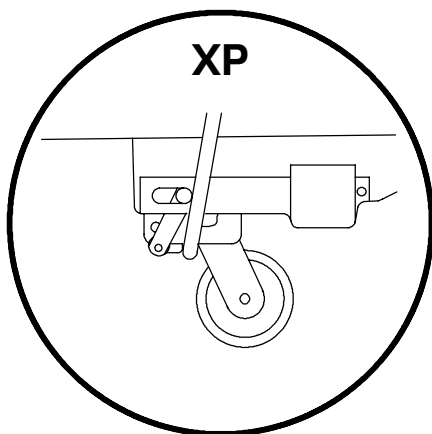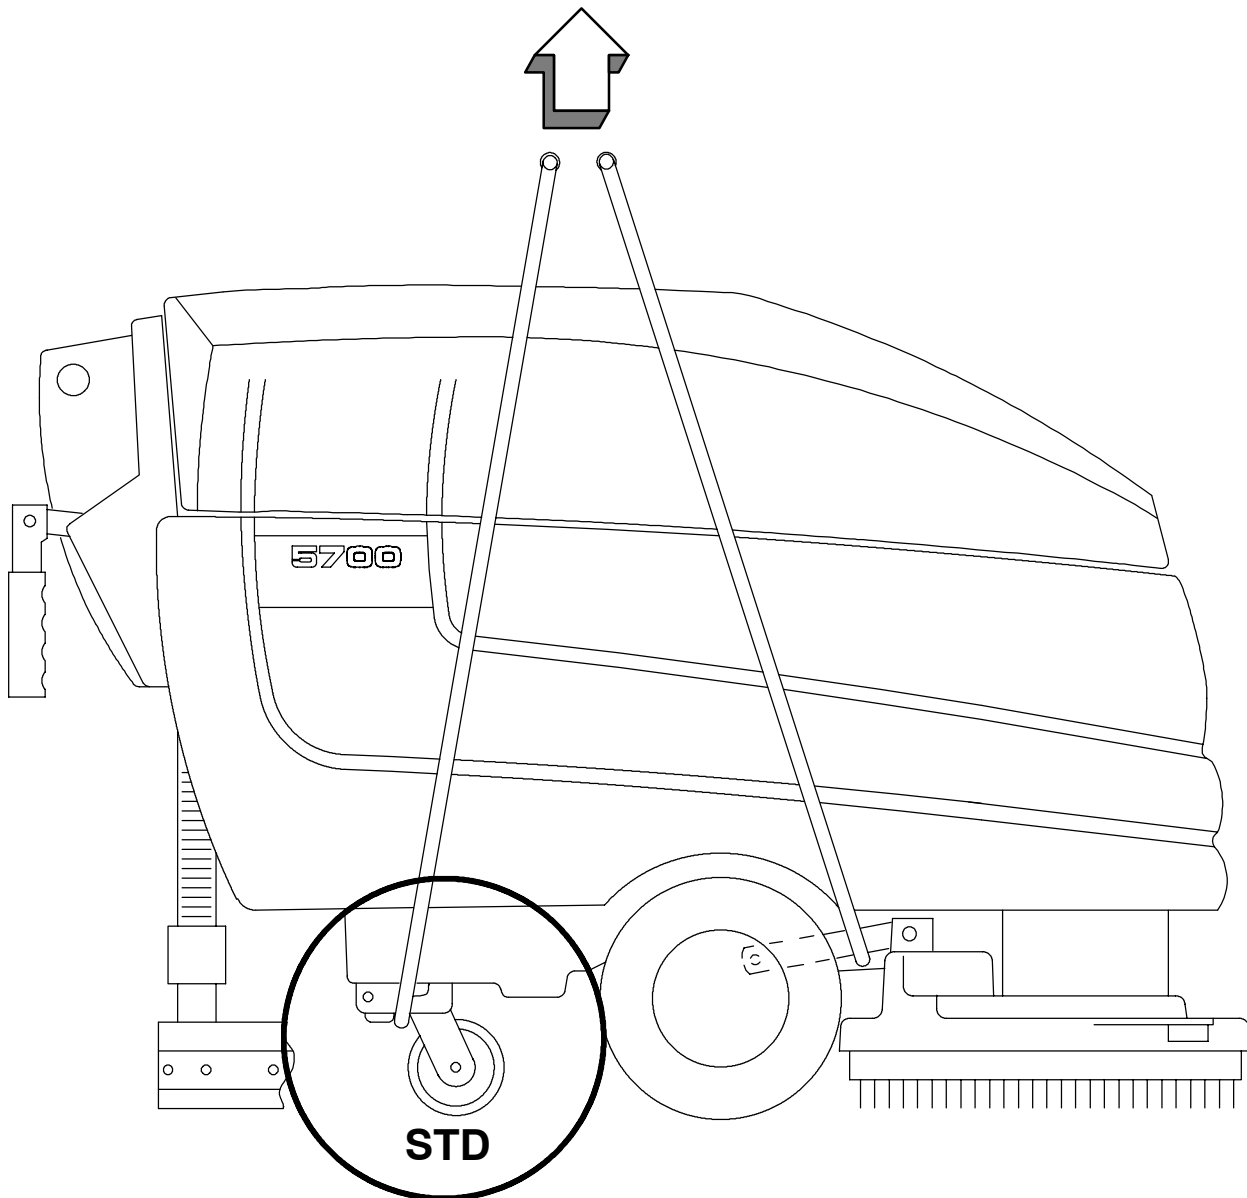

**Lifting instructions:**

- 1) Drive machine in reverse to position casters as shown.
- 2) Remove debris hopper on machines with cylindrical scrub head.
- 3) Raise scrub head.
- 4) Loop 1" wide braided lifting straps rated at 1000lb (454kg) minimum around the front and rear of the machine as shown.