

5000 Series *Automatic Scrubbers*



5000 Series Automatic Scrubbers

Superior Scrubbing Performance



The swing out split skirt system on Models 5500-5560 allow for quick and easy brush/pad changes.

Tennant's automatic floor scrubber line offers a full range of walk-behind models, with variable scrub path widths, optional recycling systems and off-aisle cleaning, we're sure to have the right scrubber for your job. All of our scrubbers feature simple controls and easy-to-read gauges so that operators do a perfect job the first time. Built to last, our scrubbers are constructed of durable rotationally molded polyethylene to withstand daily wear and tear. Most importantly, Tennant scrubbers leave your hard floors clean and attractive, dry and safe.

Every Tennant Scrubber is uniquely designed and carefully constructed to give you daily reliability and consistent results. Simple operation and superior performance make Tennant scrubbers the right choice for cleaning professionals.


Optional Recycling System for Greater Productivity

All Tennant scrubbers offer an option solution recycling system. Solution recycling is an optional accessory feature that extends scrub time up to 2.5 hours more without interruption (Graph A). This recycling system uses less solution, chemical and water while eliminating wasted time spent on emptying and refilling solution tanks.

Whether your facility has small, congested areas or wide open aisles, look to Tennant to meet all of your cleaning challenges.



The Speedlock™ feature on the 5100 makes changing brushes or pad drivers as easy as touching a button.

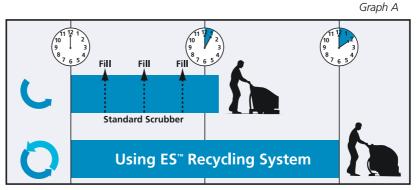

ES™ Solution recycling maximizes scrubber productivity




The 5100 is equipped with a convenient rear fill port that allows the operator to fill with a bucket or hose.



The compact 43 cm 5100 scrubber is perfect for scrubbing or stripping floors in tight spaces. The 5100 employs the Speed Lock™ feature for easy brush or pad driver changes, adjustable height console, variable down pressure to 43 kg and is available in battery or cord electric models.



The 5200 scrubber offers power and performance in a compact package. The 5200 is compact enough to scrub in smaller areas yet large enough to productively clean larger hard floor surfaces. Features include a 51 cm cleaning path, front and rear solution fill ports, floating head design, flashing safety lights and variable down pressure.

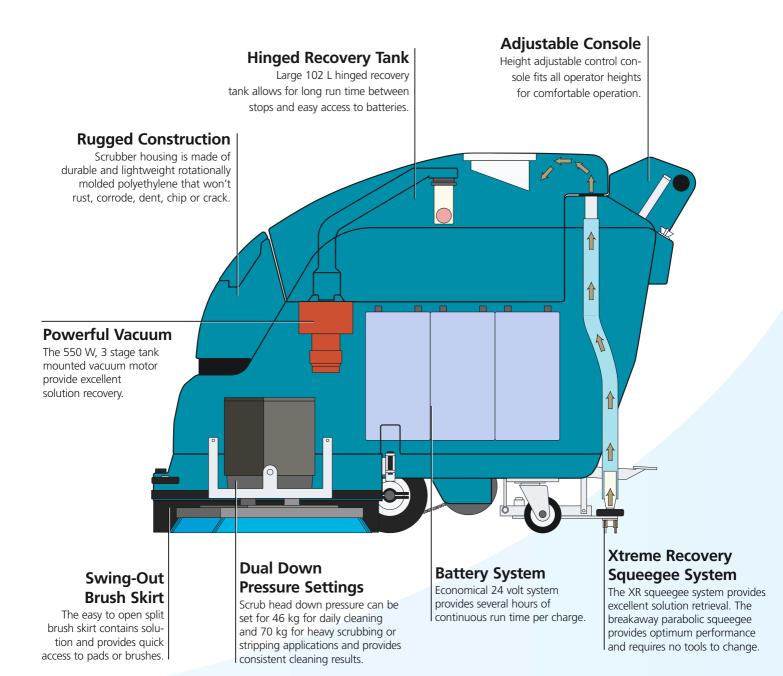



The 5500/5520 scrubbers feature variable path widths from 61 cm to 66 cm and are the perfect size for maintaining medium to wide open areas. Features on these units include front and rear solution fill ports, swing-out brush skirt, floating head design, flashing safety lights and variable down pressure to 68 kg.



Scrub large areas productively with the 5540/5560 automatic scrubbers. These automatic models features wide scrub paths from 69 cm to 84 cm, safety lights and dual down pressure settings for daily scrubbing or stripping applications. The large solution and recovery tanks and economic battery system allows for long run time between charges.

5000 SERIES AUTOMATIC SCRUBBER SPECIFICATIONS

MODEL NUMBER	5100B/5100E	5200	5500/5520	5540/5560
*Voltage	(5100E)120V (60hz)/230V (50hz)	Battery	Battery	Battery
DIMENSIONS	04.4	0.65	004	4040
Height	914 mm	965 mm	991 mm	1040 mm
Length	991 mm	1190 mm	1270 mm	1500 mm
Width w/o squeegee	495 mm	560 mm	660 mm	737 mm
Weight w/o batteries	131 kg	80 kg	170 kg	264 kg
PRODUCTIVITY				
Scrub Path (width)	430 mm	510 mm	610 mm, 660 mm	690 mm, 840 mm
Max. Coverage Rate	1581 m²/hr	1997 m²/hr	2230 m²/hr, 2415 m²/hr,	3150 m²/hr, 3464 m²/hr
TRANSPORT DRIVE	NIA	NIA	27 10/ 7	27 \\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
Power	NA	NA	.37 kW Transaxle	.37 kW (chain)
Forward Speed	NA	NA	Variable 0-4.2 Kph	Variable 0-4.2 Kph
CAPACITY				
Solution/Recovery Tank	30 L	45 L	64 L	102 L
BRUSH/PAD SYSTEM				
Down Pressure	(B) 30-43 kg, (E) 18-30 kg	23 kg	36-68 kg	46 or 70 kg
Brush Motor Power	(B) 0.56 kW, (E) 0.5 kW	0.56 kW	0.56 kW	0.56 kW
DIUSII MOLOI I OWEI	(b) 0.30 kvv, (L) 0.3 kvv	0.50 KVV	0.30 kvv	0.50 KVV
BATTERY SYSTEM				
Count	2 (5100B)	2	2	4
Rating	130 Amp	130 Amp	215 Amp	305 Amp
VACUUM SYSTEM				
Airflow at Orifice	1.87 m³/m	1.87 m³/m	1.95 m³/m	1.95 m³/m
Waterlift	1.67 H17H1	1.87 III7III 1120 mm	1.95 mm	1.93 mm
Vacuum Motor Power	0.56 kW	0.35 kW	0.56 kW	0.56 kW
Vacuum Motor Stages	2 (5100B)	2	3	3
vacadin Motor Stages	2 (31000)	4	<u> </u>	J
DECIBEL RATING				
At Operator Level	69 dBa	78 dBa	75 dBa	75 dBa

^{*}Specifications are based upon 230V/50 hz and are subject to change with varying power supply.

TO CUSTOMIZE, HERE ARE YOUR OPTIONAL ACCESSORIES:

5100E-Wet pick-up kit, ES™ recycling kit and power wand pump, hour meter

5100B-Wet pick-up kit, ES™ recycling kit, power wand pump,

hour meter, quick change battery cables, hose assembly and power wand

5200-Wet pick-up kit, ES™ recycling kit, sound reduction kit, drive hub

5500/5520-Wet pick-up kit, ES™ recycling kit, key switch, parking brake

5540/5560-Wet pick-up kit, ES™ recycling kit, down pressure spring

Refer to the Tennant International Price list for additional accessories such as squeegees, batteries and pads.

(Specifications subject to change)

Creating a cleaner, safer world™

Tennant Company offers the most complete line of floor and surface maintenance equipment, floor coatings, brushes and cleaning detergents in the world for the industrial, commercial and outdoor cleaning markets. Our sales and service networks provide you with integrated custom cleaning solutions to meet any floor care need.



Tennant Company

701 North Lilac Drive, Minneapolis, MN 55422, USA P.O. Box 1452 , Minneapolis, MN 55440, U.S.A. Tel: (763) 540-1200, Fax: (763) 513-2144

Commercial Products

12875 Ransom Street, Holland, MI 49424, USA Tel: (616) 786-2330, Fax: (616) 786-2345 E-mail: tcoinfo@tennantco.com Web site: www.tennantco.com

Authorized	Tennant	Sales	Representative
------------	---------	-------	----------------