


CREATING A CLEANER, SAFER, HEALTHIER WORLD.

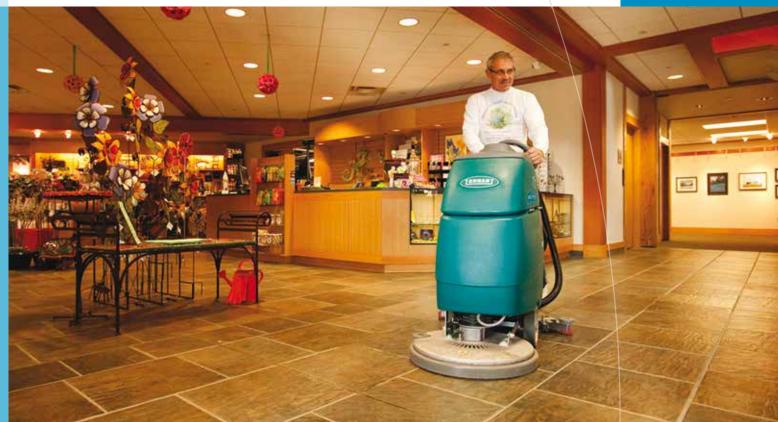

T3

- Just-scrubbed floors are immediately clean, dry and safe for traffic with ec-H2O[™] and FaST[®] technologies
- 75% lower sound level (68.5 dBA)
- Easily cleanable, sanitary Hygenic® solution and recovery tanks

A HIGH-PERFORMANCE SCRUBBER-DRYER TO MATCH YOUR HIGHER STANDARDS WITH ec-H2O™ OR FaST® TECHNOLOGY



IMPROVE ENVIRONMENTAL HEALTH IN YOUR FACILITY

Exclusive Hygenic® tanks allow for easy access and hygiene, reducing mould, bacteria and other contaminants that can grow in enclosed tanks.

QUIETLY CLEAN IN NOISE-SENSITIVE ENVIRONMENTS

At only 68.5 decibels, the T3 is 75% quieter than leading competitive models – comparable to normal conversation levels.

DON'T LEAVE BEHIND CLEANING SOLUTION

Even around 180-degree turns, the T3's equal-pressure, parabolic squeegee recovers all cleaning solution from the floor.

ENGINEERED FOR SAFETY


Minimise the risk of slip-and-fall injuries and help control insurance costs. Floors are clean, dry and safe for foot traffic immediately when scrubbed with ec-H2O™ and FaST technologies.

Reduce operator fatigue and increase productivity. Ergonomic design makes cleaning with the T3 more comfortable.

Increase scrubbing effectiveness and quality. Clear sight lines and simple controls mean operators can focus solely on their cleaning environment.

INSIDE THE

T3

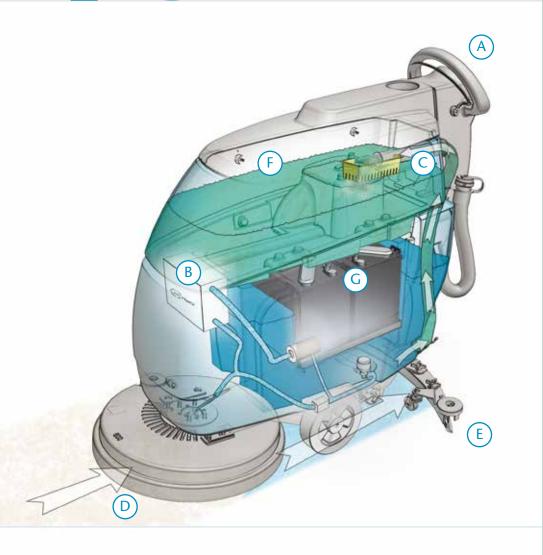

- Easily train new operators to use the simple, intuitive controls.
- Scrub for up to 80 minutes on a single tank. Up to 90% longer than comparable machines with Green Seal certified FaST® Foam Scrubbing Technology or ec-H2O™ technology.
- Solution and recovery tanks easily cleanable. Exclusive Hygenic® tanks are fully accessible for hygiene.
- Eliminate the need for follow-up passes and non-productive mop-ups. A fully self-adjusting splash skirt captures 100% of scrub deck overspray.
- Quickly remove and replace brushes and squeegees. Plus, with the "no hassle" squeegee system, there are no tools for maintenance, and the blade is factory set at the optimum recovery angle.
- Eliminate operator contact with waste water and prevent clogged hoses/drains with the convenient debris tray.
- Save time and storage space with the on-board charger.

EXCLUSIVE TECHNOLOGIES

(optional cleaning innovations)

All technologies increase scrub time up to three times using a single tank of water.



ec-H2O[™] technology electrically converts water into a cleaning solution that cleans effectively, saves money, improves safety, and reduces environmental impact compared to daily cleaning floor chemicals¹.



FaST® Foam Scrubbing Technology uses up to 70% less water and 90% less chemicals to improve floor traction as certified by NFSI, helping reduce the risk of slip-and-fall accidents.

¹ ec-H2O technology is not designed for all soils, including heavy concentrations of fats and oils. Conventional chemical cleaners may be required for those soils.

ENVIRONMENTAL STEWARDSHIP



ec-H2O and FaST technologies are NFSI (National Floor Safety Institute) Certified. NFSI certification ensures a product has passed a 2-phase testing process, proving the floor product helps to reduce potential for slip-and-fall accidents.



ec-H2O and FaST technologies are registered by NSF International. NSF International is an independent, not-for-profit organisation that ensures formulation and labels on these products meet appropriate food safety regulations.



Tennant FaST 365 and FaST 965 detergents have been awarded the European Eco-label. This proves that our Tennant

FaST detergents have a reduced environmental impact compared to standard detergents



ec-H2O technology won the **European Business Award 2009** for the Business Innovation of the Year, one of the most prestigious business awards. The European Business Awards (www.businessawardseurope.com) is an independent awards programme designed to recognise and promote excellence, best practice and innovation in the European business community.















T3 WALK-BEHIND SCRUBBER-DRYER

SCRUBBING SYSTEM	430MM PAD ASSIST	500MM WITH DRIVE
Productivity (per hour) Theoretical Max Estimated Coverage Conventional* ec-H2O / FaST SOLUTION DELIVERY SYSTEM	1720 m²/h 950 m²/h	2500 m²/h 1125 m²/h
Solution tank description Solution capacity RECOVERY SYSTEM	Full access & cleanable 40 L	Full access & cleanable 40 L
Recovery tank description Recovery tank capacity (include demisting chamber) Vacuum motor Vac motor CFM Vac motor sealed waterlift BATTERY SYSTEM	Full access & cleanable 57 L 0,5 hp/0,37 KWw- two stage 184 mm 1020 mm	Full access & cleanable 57 L 0,5 hp/0,37 KWw- two stage 184 mm 1020 mm
System voltage Battery amp hour rating Battery run time Brush/Pad pressure MACHINE SPECIFICATIONS	24 Volt 110Ah C5 3,5h 23 kg	24 volt 110Ah C5 2,6h 19 kg
Product width with squeegee Product height Product weight (with batteries) Power consumption amps Decibel rating (operator's position)	490 mm 1090 mm 174 Kg 27 amp nominal 68,5 dBA	760 mm 1090 mm 175 Kg 29 amp nominal

WARRANTY

See your local representative for warranty information.

GENUINE TENNANT PARTS, SUPPLIES AND SERVICE

Tennant Service Programme

- Maximise safety, productivity and uptime
- Control and protect your investment and lower your total cost of ownership
- Benefit from over 200 factory-trained service technicians across Europe

Tennant Parts & Supplies

- Operate your machine with confidence
- Benefit from years of worry-free operation

Tennant Cleaning Solutions

- Obtain sustainable cleaning results every time
- Choose sustainable benefits your company wants

Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information contact us:

TENNANT UK CLEANING SOLUTIONS LTD

Gladstone Road Northampton NN5 7RX Tel: 0800 111 4402 (local rate UK only) Tel: 01604 583191 Fax: 0845 052 9349

E-mail: sales.uk@tennantco.com E-mail: enquiries@tennantco.com **TCS EMEA GmbH** Sommerfeld 1 5202 Neumarkt am Wallersee **AUSTRIA** Tel: +43 (0)6216 4524 & 4525

Fax: +43 (0)6216 4524 20 E-mail: office@tennant-cee.com **TENNANT EUROPE NV** Roderveldlaan 3 2600 Antwerp Tel: +32 3 217 94 11 Fax: +32 3 217 94 19 E-mail: europe@tennantco.com