



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT



Sentinel®

HIGH-PERFORMANCE OUTDOOR SWEEPER

- Deliver excellent sweeping performance in the harshest, most congested environments
- Achieve consistent cleaning results from all-weather sweeping capability
- Ensure a healthy and safe environment with improved air quality from PM-10 certified dust control system
- Maximize operator comfort and safety with full-view, cab-forward design

KEY SENTINEL® SWEEPER FEATURES TO HELP MAXIMIZE PRODUCTIVITY, REDUCE COSTS, AND INCREASE SAFETY



- **Effectively clean uneven surfaces** with main brush center-point suspension.
- **Meet the most stringent PM-10 environmental air quality requirements** with hydraulic twin-vacuum dust control system.
- **Lock out noise and dust** for increased operator safety with roomy, sealed pressurized cab interior.
- **Easily power off vacuum fans** when sweeping in wet conditions with separate vacuum fan shutoff.
- **Lessen vibration and increase operator comfort** with pneumatic tires and leaf-spring suspension.
- **Sweep on both sides of the machine** with optional Vario Sweeping Brush™.
- **Steer clear of obstacles and increase visibility around the machine** using in-cab monitor and PerformanceView™.
- **Prevent double-handling of debris** and discharge into large roll offs and dump trucks with optional multi-level dump hopper.
- **Increase machine awareness and improve safety** with optional front and rear warning lights.
- **Easily monitor machine performance** with high-visibility touch-screen control panel.
- **Effectively train operators** with on-board training videos.
- **Multiple configurations for your cleaning needs:**
 - Dry Side Brush Dust Control
 - Wet Side Brush Dust Control
 - Wet and Dry Side Brush Dust Control

A HIGH-PERFORMANCE, ALL-WEATHER OUTDOOR SWEEPER WITH EXCEPTIONAL DUST CONTROL FOR CLEANING IN HARSH, CONGESTED ENVIRONMENTS



THE SENTINEL® DELIVERS EXCEPTIONAL BENEFITS TO MEET YOUR SWEEPING CHALLENGES



REDUCE COST TO CLEAN

Keep costs low with solid shaft design that increases conveyor life over previous models, reducing cost of ownership.



HEALTH & SAFETY

Protect employees and facilities from potentially harmful dust with the unique, twin-vacuum all-weather dry dust control system with PM-10 certification.



ENHANCE FACILITY IMAGE


Ensure your facilities always look great with a robust and proven design that enables you to sweep in any season.



EASY OPERATION & MAINTENANCE

Deliver consistent sweeping results and easily maneuver through congested areas with four-wheel power steering.

INSIDE THE Sentinel®

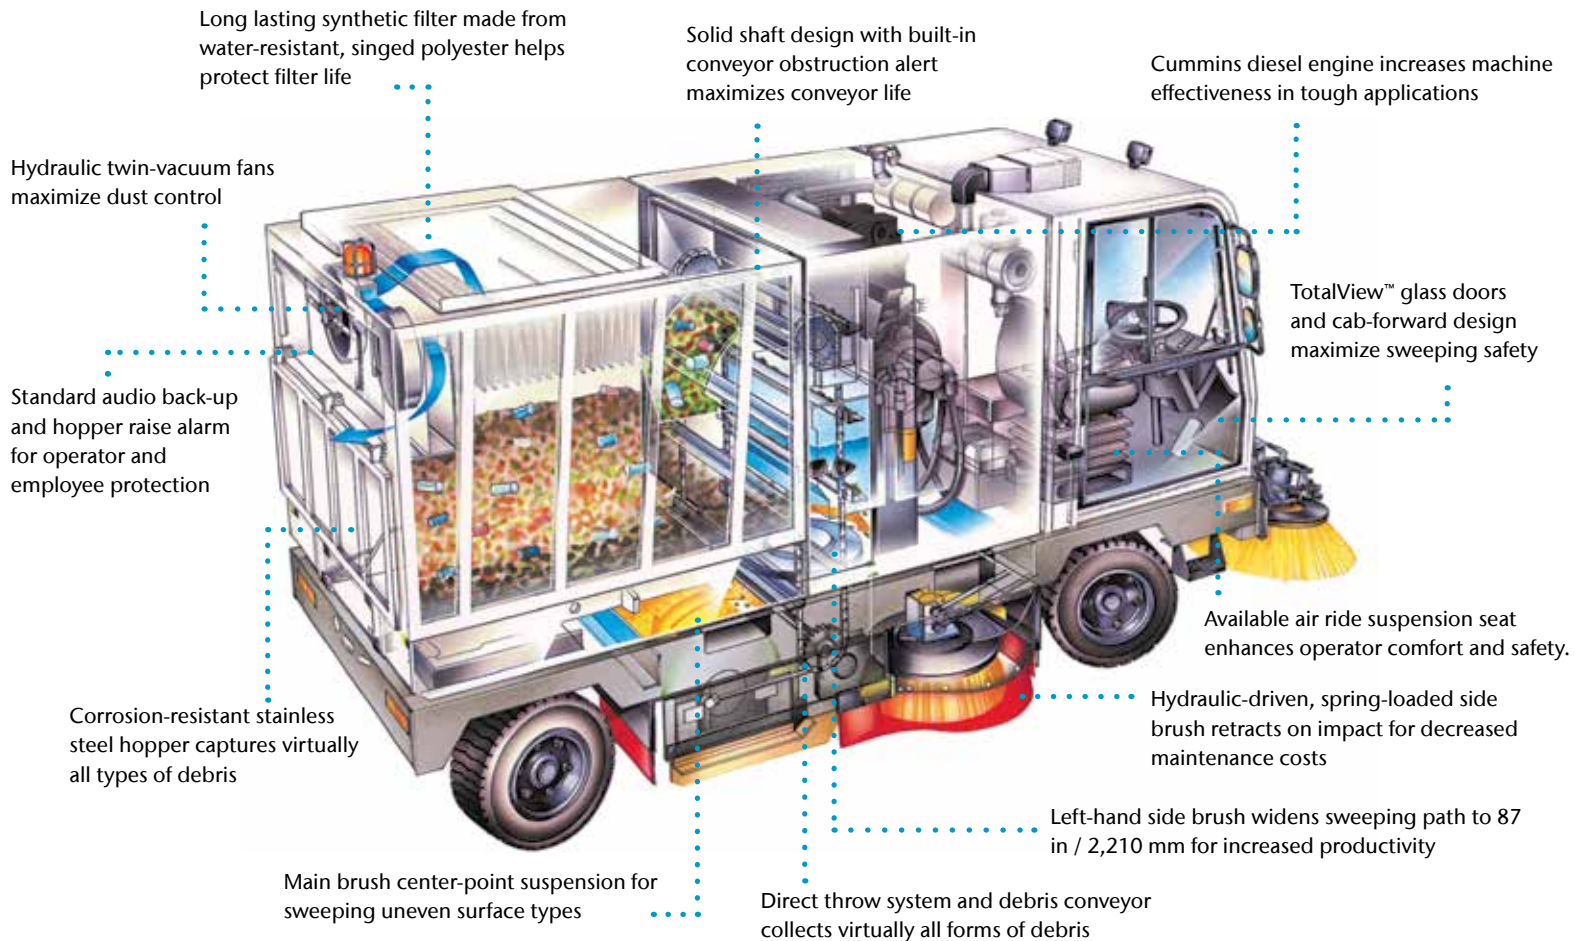

Excellent dry dust control featuring full skirting around side brushes and main brush, using durable high-density polyethylene skirts and rubber coated nylon covers.

Wet dust control with adjustable spray nozzles helps knock down dust with fine water mist fed from a 94 gal / 355 liter on-board water tank.

Machine maintenance made quick with easy access to engine and conveyor.

(Photo shown with optional accessories.)



ENGINEERED FOR PRODUCTIVITY AND VERSATILITY

TECHNOLOGY PROVIDES GREATER FLEXIBILITY IN HARD TO REACH AREAS

Optional Vario Sweeping Brush™ allows the Sentinel the ability to sweep on top of curbs, collect hard to reach debris from corners, around fixed obstacles and in congested areas for increased productivity and more effective sweeping.



OPTIONAL VARIO SWEEPING BRUSH™



ONE-TOUCH ACTIVATION

- One touch activation simplifies operator training with controls that enable sweeping systems to be activated with a single button.

4-Wheel power steering allows easy access to tight spaces by delivering a 13 ft / 3,960 mm turning radius with exceptional maneuverability.



4-WHEEL STEERING



PERFORMANCEVIEW™ CAMERA SYSTEM

- Safely monitor the side and rear areas of the machine with the PerformanceView™ camera system.



SELF-TENSIONING CONVEYOR

Optional vacuum wand enables operators to clean under and around obstructions.

Optional high-pressure spray hose delivers powerful off-machine cleaning.

Optional 9.5 ft / 2,900 mm multi-level dump, with hopper overload indicator, enables you to easily empty debris in most places you need.

Optional Central Lubrication System provides automatic greasing of critical components to ensure proper machine performance and maximum life.

KEY OPTIONS



TENNANTTRUE® PARTS, SERVICE AND FINANCE SOLUTIONS

- Reduce rework and improve uptime by leveraging TennantTrue parts and service.
- Ensure optimal cleaning performance by selecting a TennantTrue Service program provided by a network of over 450 factory-trained Tennant service representatives.
- Simplify budgeting by bundling TennantTrue service plans, including parts, into the purchase or financing of your machine.

Lease. Pre-Owned. Rent. Tennant has flexible options that get you the machines you need, however you need them.

SENTINEL® HIGH-PERFORMANCE OUTDOOR SWEEPER

SWEEPING SYSTEM

| | |
|--|-------------------|
| Cleaning path | |
| Single side brush | 69 in / 1,750 mm |
| Dual side brushes | 87 in / 2,210 mm |
| With dual side brushes and Vario Sweeping Brush™ | 126 in / 3,200 mm |

BRUSH DRIVE SYSTEM

| | |
|--|---------------------|
| Main brush length (tubular) | 51 in / 1,295 mm |
| Main brush lift | Hydraulic |
| Main brush diameter | 24 in / 610 mm |
| Side broom diameter (disk) | 32 in / 810 mm |
| Vario Sweeping Brush™ Diameter | 38 in / 965 mm |
| Hopper volume capacity | 3.4 yd³ / 2.6 m³ |
| Hopper weight capacity (stainless steel) | |
| Low dump | 7,000 lb / 3,175 kg |
| High dump | 4,000 lb / 1,815 kg |
| Hopper dump height | |
| Low dump | 40 in / 1,015 mm |
| High dump | 114 in / 2,895 mm |

PROPELLING SYSTEM

| | |
|---|----------------------------|
| Engine, turbo diesel, Cummins Tier 4 Final/Stage IV | |
| Gross Intermittent Power* | 100.6 hp / 75 kW @2200 rpm |
| Tennant Governed Power | 100.6 hp / 75 kW @2200 rpm |
| Engine-Diesel, Cummins Tier 3, Stage IIIA | |
| Gross Intermittent Power* | 99.2 hp / 74 kW @2200 rpm |
| Tennant Governed Power | 99.2 hp / 74 kW @2200 rpm |
| Propel speed forward (variable to) | 25 mph / 40 km/h |
| Propel Type | Hydrostatic |
| Gradeability | |
| Full hopper | 8 deg / 14% |
| Empty hopper | 12 deg / 21% |

DUST CONTROL SYSTEM

| | |
|----------------------|--|
| Filter system | Dry-filtering |
| Filter type | Mildew resistant, synthetic envelope style |
| Filter area | 221 ft² / 21 m² |
| Dust filtration (to) | PM-10 certified, AQMD-Rule 1186 Certified |
| Vacuum fan motor (2) | 15 hp each / 11 kW each |

MACHINE SPECIFICATIONS

| | |
|---------------------------|----------------------|
| Length | |
| Standard machine | 175 in / 4,445 mm |
| With Vario Sweeping Brush | 206 in / 5,230 mm |
| Width | 70 in / 1,780 mm |
| Height | 102 in / 2,580 mm |
| Weight-net base machine | 12,600 lb / 5,715 kg |
| Turning radius | 13 ft / 4 m |

WARRANTY

See your local representative for warranty information.

*Per SAE J1995

Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information,
call +1.800.553.8033 or email info@tennantco.com

Tennant
701 North Lilac Drive
Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
Overseas: +1.763.540.1315

www.tennantco.com
info@tennantco.com