



INSTRUCTION BULLETIN

No. 340187
Machine: 6100E, 7200
Published: 9-98/00
System: OPTIONS

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in your machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save you the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation instructions for kit number 369362

SYNOPSIS / PROBLEM:

This kit contains the parts needed to assemble a rollout battery kit dolly for the model 6100E sweeper and 7200 scrubber.

Please follow step-by-step instructions.

SPECIAL TOOLS / CONSIDERATIONS: NONE

(Estimated time to complete: 1 hour)

PREPARATION:

(Refer to FIG. 1)

1. Remove the rollout battery dolly kit from shipping packaging.

INSTALLATION:

FOR MODELS 6100E and 7200

(Refer to FIG. 1)

1. Mount the battery cart handle to the front of the battery cart in the vertical channel using the clevis pin (24) and cotter pin (26). (Refer to FIG. 1)
2. Remove the battery stop bar from the battery cart handle, (it is usually taped to the inside of the battery cart handle for shipping).
3. Mount the battery stop bar in the rear mounting location with the clevis pin (31), and cotter pin (28). The longer end of the stop bar should be pointing toward the inside of the cart, with the opposite covered end pointing upwards. (Refer to FIG. 1)

FOR MODEL 7200 ONLY

1. Remove the battery case stop bracket (40) from the frame weldment. (Refer to FIG. 1)
2. Remove the rubber bumper (27) from the stop bracket (40). Set mounting hardware aside. (Refer to FIG. 1)
3. Mount the rubber bumper (27) to the center hole of the vertical channel with set aside hardware. Discard the removed stop bracket (40) and its mounting hardware. (Refer to FIG. 1)

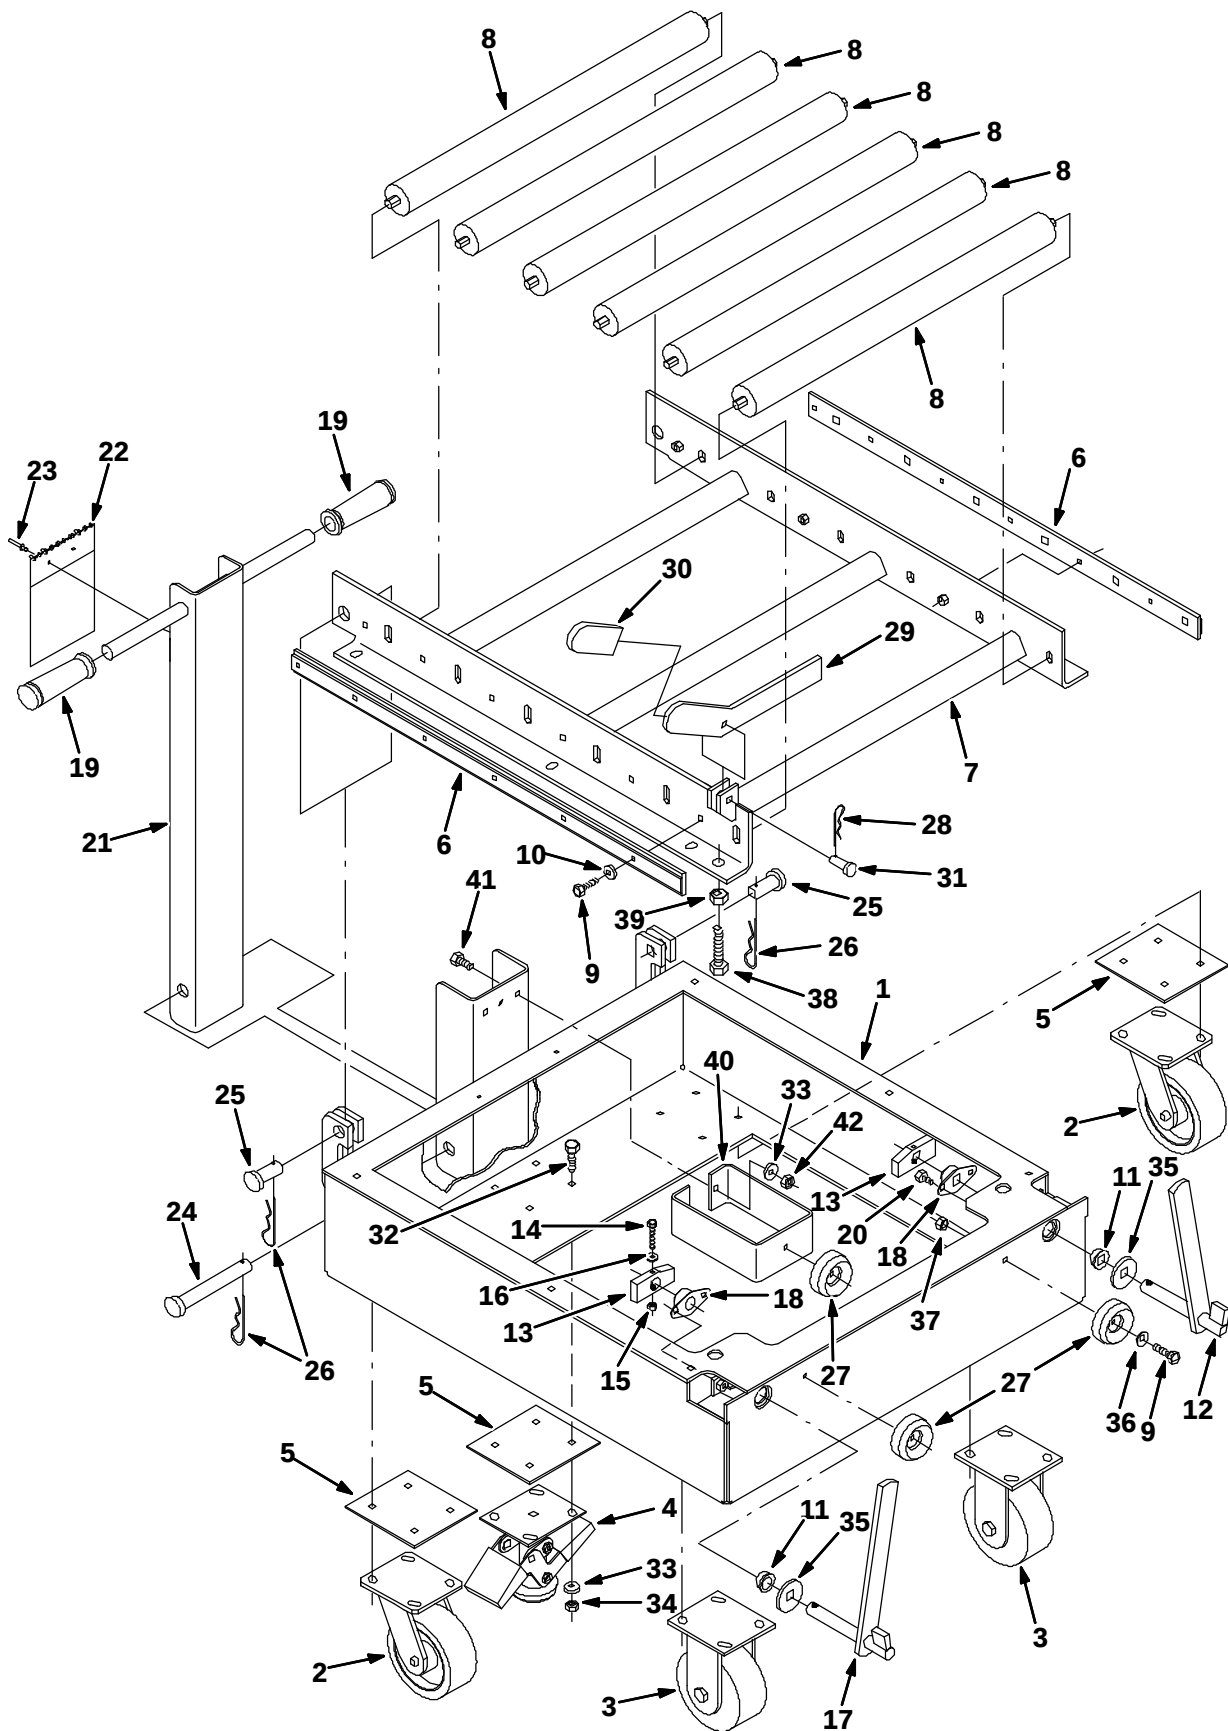


FIG. 1 Breakdown of Battery Rollout Dolly Kit 369362

BILL OF MATERIALS FOR BATTERY ROLLOUT DOLLY KIT 369362

Ref.	Tennant Part No.	Description	Qty.
1	369435	Frame, Batt Cart, 7200	1
2	222467	Caster	2
3	369373	Caster, Battery, Cart	2
4	369374	Floor Lock	1
5	369372	Plate, Spacer, Caster	3
6	369466	Cap Wldt, Roller Shaft	2
7	369462	Frame Wldt, Mtg, Roller	1
8	369371	Roller Assy, 24 In, Batt Cart	6
9	09010	Screw, Hex, M08-1.25 X 25, Ss	12
10	01685	Washer, Flat, .31 Ss	12
11	369487	Grommet,Nylon, .75Id,1.00Dmtg	2
12	369473	Lock Wldt, Lh, Batt Cart	1
13	369478	Block, Stop, Batt Cart Lock	2
14	06947	Screw, Hex, M06-1.0 X 40, 8.8	2
15	08708	Nut, Hex, Lock, M06-1.0, NI	2
16	01684	Washer, Flat, .25 Ss	2
17	369474	Lock Wldt, Rh, Batt Cart	1
18	223065	Bearing, Flange	2
19	222648	Grip, Handle, Round	2
20	15675	Screw, Hex, M08-1.25 X 16, Ss	4
21	369470	Handle Wldt, Batt Cart	1
22	83394	Instr., Use And Care, Batt Cart	1
23	87821	Rivet, Pop	2
24	54660	Pin, Clevis	1
25	02141	Pin, Clevis	2
26	55094	Pin, Hair Cotter	3
27	369481	Bumper, Rubr. 2.50DiAx 1.00	3
28	21120	Pin, Haircotter	1
29	369496	Bar, Batt.Stop	1
30	385612	Grip, Handle	1
31	58078	Pin, Clevis	1
32	03192	Screw, Hex, M10-1.5 X 30, 8.8	20
33	32492	Washer, Flat, .38 Hard	22
34	41430	Nut, Hex, Lock, M10-1.5, NI	20
35	39350	Washer, Flat, .75 Sae	2
36	32491	Washer, Flat, .31 Hard	3
37	08709	Nut, Hex, Lock, M08-1.25,NI	3
38	06416	Screw, Hex, M12-1.75 X 50, FI	2
39	39313	Nut, Hex, Std, M12-1.75	2
40	83380	Bracket, Stop, Battery Case	1
41	39283	Screw, Hex, M10-1.5 X 25, 8.8	2
42	66185	Nut-Hx Std M10X1.25	2

TENNANT COMPANY
P. O. Box 1452
Minneapolis, MN 55440-1452