



INSTRUCTION BULLETIN

No. 340599
Machine: 7300, 8300
Published: 12-2009
Rev. 01

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in the machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation instructions for **kit number 374250 / 9006924**

DESCRIPTION:

This kit contains the parts needed to install a rear squeegee guard on 7300 / 8300 machines equipped with the MaxPro 1200 disk scrub head.

Please follow step-by-step instructions.

SPECIAL TOOLS / CONSIDERATIONS: Hand drill, 3/8" [9.5 mm] drill bit

(Estimated time to complete: 1/2 hour)

PREPARATION:

FOR SAFETY: Before leaving or servicing machine, stop on level surface, set parking brake, turn off machine, and remove key.

INSTALLATION:

1. Position the new bumper guard (1) on the right rear corner of the guard bar. (Refer to FIG. 1)
2. Use the new bumper guard as a template to mark and drill two 3/8" [9.5 mm] mounting holes.
3. Mount the bumper guard (1) with two hex screws (2), flat washers (3), and lock nuts (4). (Refer to FIG. 1)

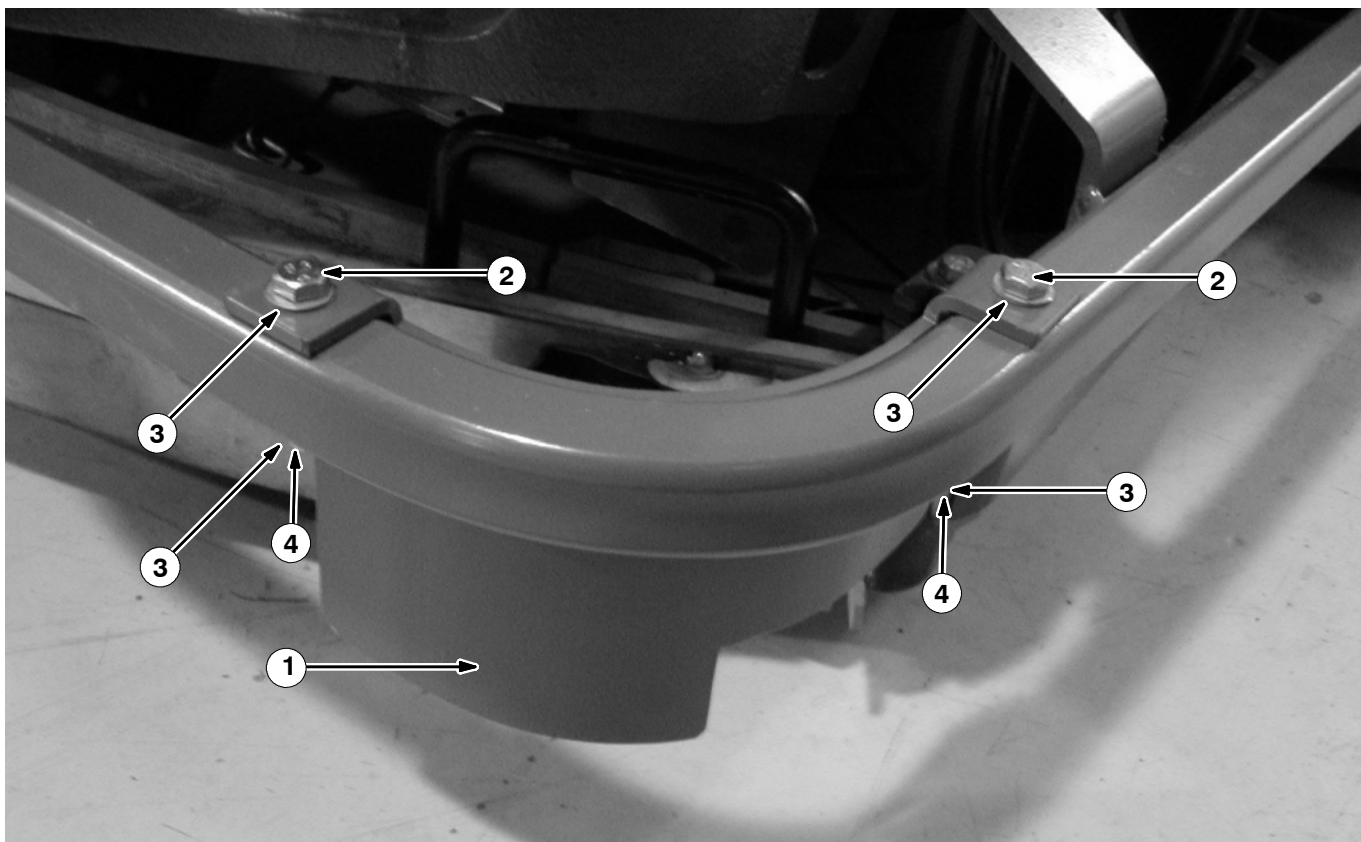


FIG. 1 - Bumper Guard Installation

BILL OF MATERIALS FOR REAR SQUEEGEE GUARD KIT 374250

Ref.	TENNANT Part No.	Description	Qty.
1	1007486	Guard, bumper	1
2	39278	Screw, hex, M08 X 1.25 X 50, 8.8	2
3	32491	Washer, flat, 0.31 std	4
4	08713	Nut, hex, lock, M8 X 1.25, NI, Ss	2

BILL OF MATERIALS FOR REAR SQUEEGEE GUARD KIT 9006924

Ref.	TENNANT Part No.	Description	Qty.
5	1057073	Guard, Bmpr, Iron Gray	1
6	39278	Screw, hex, M08 X 1.25 X 50, 8.8	2
7	32491	Washer, flat, 0.31 std	4
8	08713	Nut, hex, lock, M8 X 1.25, NI, Ss	2

TENNANT COMPANY
P. O. Box 1452
Minneapolis, MN 55440-1452