



HANDLE REPLACEMENT KIT

INSTALLATION INSTRUCTIONS:

(Installation Time: 15 minutes)

TOOLS REQUIRED: Wire Cutters, Wire Crimping Tool, 3/4" Wrench, Prying Tool.

FOR SAFETY: When servicing machine, unplug cord from wall outlet.

1. Lower handle completely. Pry out the wiring strain relief grommet from the back of the motor cover. Carefully pull wires through hole to expose terminals (Figure 1).



Fig. 1

2. Disconnect the white and black wires. Cut below the splice terminal on the green wire, as shown (Figure 2).



Fig. 2

3. Remove the two pivot bolts from the base of the handle and remove handle from the machine (Figure 3).

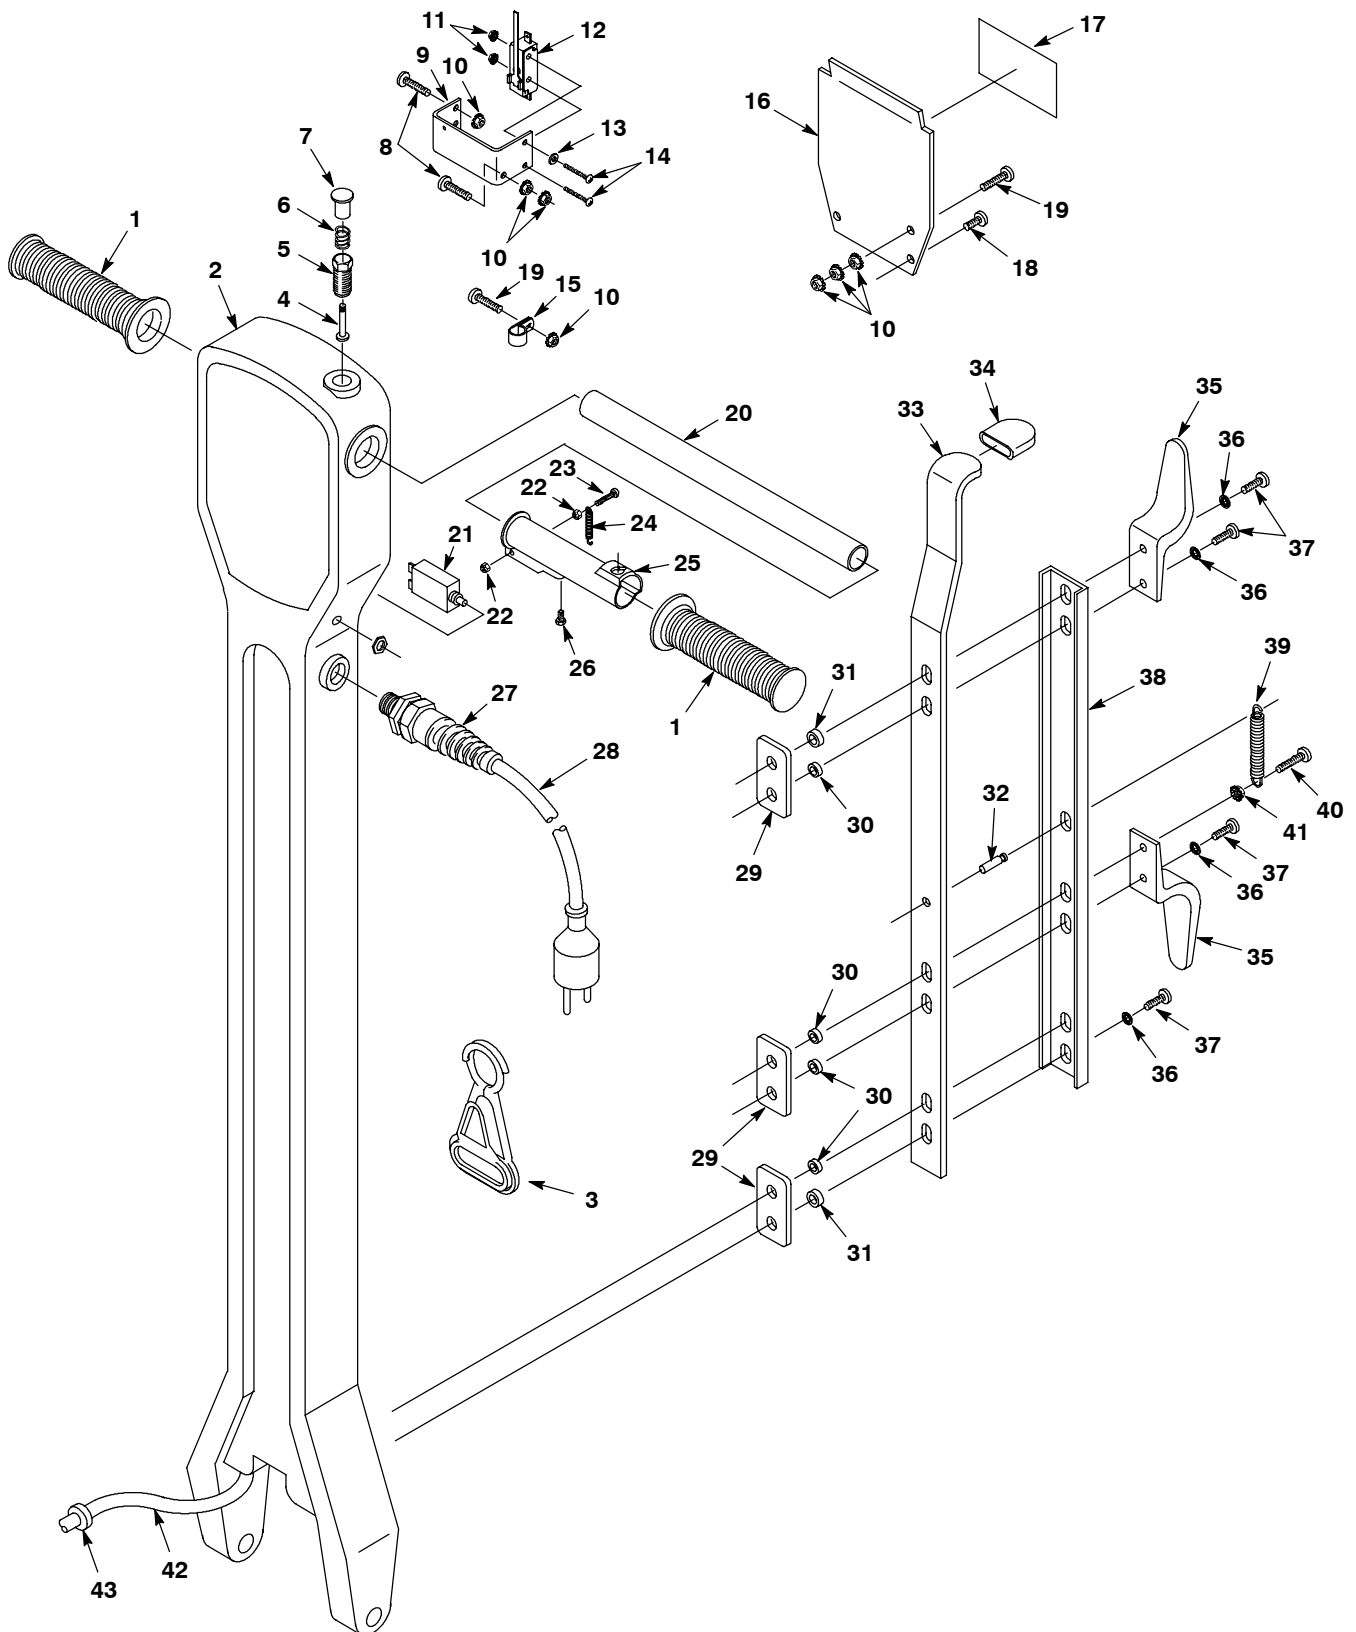


Fig. 3

4. Mount new handle to the machine using existing hardware. Connect handle wires to base wires, white to white and black to black. Crimp green wires together. Route wires back into motor cover and re-insert strain relief grommet.

Please keep this parts list with your owner's manual for future reference.

HANDLE REPLACEMENT KIT



HANDLE REPLACEMENT KIT PARTS LIST

REF	PART #	DESCRIPTION	QTY.
1	200823	GRIP, HANDLE TUBE	2
2	607637	HANDLE, OFF-WHITE	1
3	130176	●CLIP, CORD, STRAIN RELIEF YELLOW (BELT)	1
4	230856	PIN, LOCK RELEASE	1
5	230857	SOCKET, LOCK	1
6	140401	SPRING, LOCK BUTTON	1
7	230855	BUTTON, LOCK RELEASE	1
8	140823	SCREW, 10-24X5/8	3
9	230854	BRACKET, SWITCH	1
10	140519	NUT, 10-24 KEP	8
11	140539	NUT, 6-32 KEP	2
12	1013132	●SWITCH, LEVER, SNAP ACTION	2
13	140032	WASHER, #6 FLAT	1
14	140830	SCREW, 6-32X1-5/8	2
15	140324	CLAMP, CABLE 5/16 ID BLK NYLON	1
16	609700	COVER, REAR PANEL	1
17	613286	LABEL, WARNING, AC FLOOR MACHINE	1
18	140197	SCREW, #10-24X3/8 TRSPHL	2
19	140900	SCREW, #10-24X3/4	2
20	230853	HANDLE, TUBE	1
21	130670	●BREAKER, CIRCUIT, 12 AMP	1
22	28990	NUT, 8-32 NYLOCK	2

● RECOMMENDED STOCK ITEMS

REF	PART #	DESCRIPTION	QTY.
23	6010.16	SCREW, 8-32X1	1
24	600987	SPRING	1
25	100355	SLEEVE, LOCKING	1
26	24672	SCREW, HEX, .25-20X0.75 SS	1
27	130167	●GRIP, CORD	1
28	600324	●CORD, 3X1.5MM2X15M BLACK	1
29	230852	PLATE, BACKING	3
30	140147	BUSHING, .25X.44X.20	4
31	140146	BUSHING, .25X.50X.19	2
32	140604	PIN, GROOVE 1/4X3/4	1
33	611141	LATCH, HANDLE	1
34	200821	●GRIP, LATCH	1
35	602750	HOOK, CORD	2
36	140052	WASHER, 1/4 EXT	5
37	140864	SCREW, 1/4-20X3/4	5
38	230859	CHANNEL, LATCH HANDLE	1
39	140402	SPRING, HANDLE LATCH	1
40	140881	SCREW, 1/4-20X1	1
41	140524	NUT, 1/4-20 KEP	1
42	130204	CORD, 14/3X57" BLACK	1
43	130141	BUSHING, STRAIN-RELIEF	1