TENNANT INSTRUCTION BULLETIN

No. 340105 Machine: 6080 G/LP 3640 G/LP Published: 9-99/01 System: ENGINE

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in your machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save you the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation Instructions for Kit number 379006

SYNOPSIS / PROBLEM:

This kit contains the parts needed to install an engine oil drain kit on the model 6080 G/LP and 3640 G/LP sweepers. Please follow step-by-step instructions.

SPECIAL TOOLS / CONSIDERATIONS: Drain pan

(Estimated time to complete: .5 hour)

INSTALLATION:

(Refer to FIG. 1)

FOR SAFETY: Before leaving or servicing machine, stop on level surface and set parking brake. Then turn off machine and remove key.

- 1. Warm engine oil by running the engine. Shut off the machine.
- 2. Open the engine cover and locate the oil drain plug at the rear of the engine. (Refer to FIG. 1)
- 3. Place a drain pan under the drain plug. (Refer to FIG. 1)
- 4. Remove and retain the engine drain plug. Let the oil drain into the pan. (Refer to FIG. 1)
- 5. Install one of the sealing washers (2) onto the oil drain tube (1). (Refer to FIG. 1)
- 6. Install the oil drain tube (1) in the engine where the drain plug was removed. Use a 14 mm wrench. (Refer to FIG. 1)
- 7. Install the existing drain plug and the second sealing washer (2) in the end of the oil drain tube (1). (Refer to FIG. 1)
- 8. Refill the engine with the proper grade of oil. (1.4 pt of 30 SAE-CD/SE rated oil)
- 9. Close the engine cover.

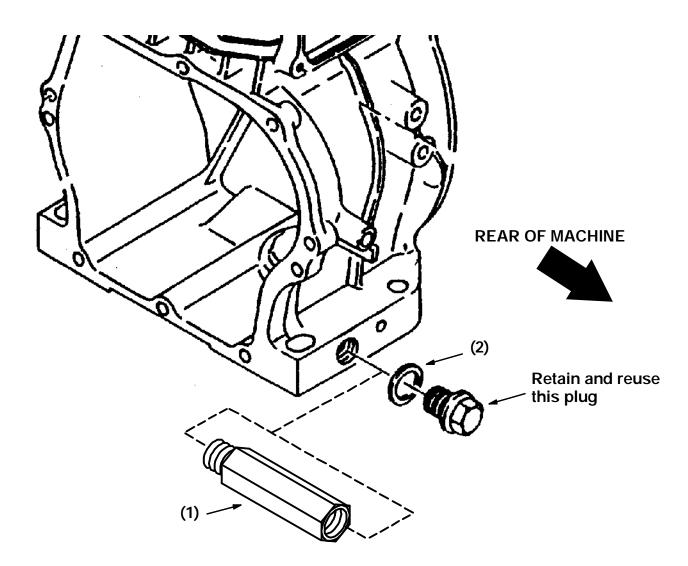


FIG. 1 - Installation Of Drain Tube BILL OF MATERIALS FOR ENGINE OIL DRAIN KIT

Ref.	TENNANT Part No.	Description	Qty.
1	379004	Oil drain tube	1
2	379003	Sealing washer	2

TENNANT COMPANY P. O. Box 1452 Minneapolis, MN 55440-1452